




GROUND FLOOR PLAN
1:100

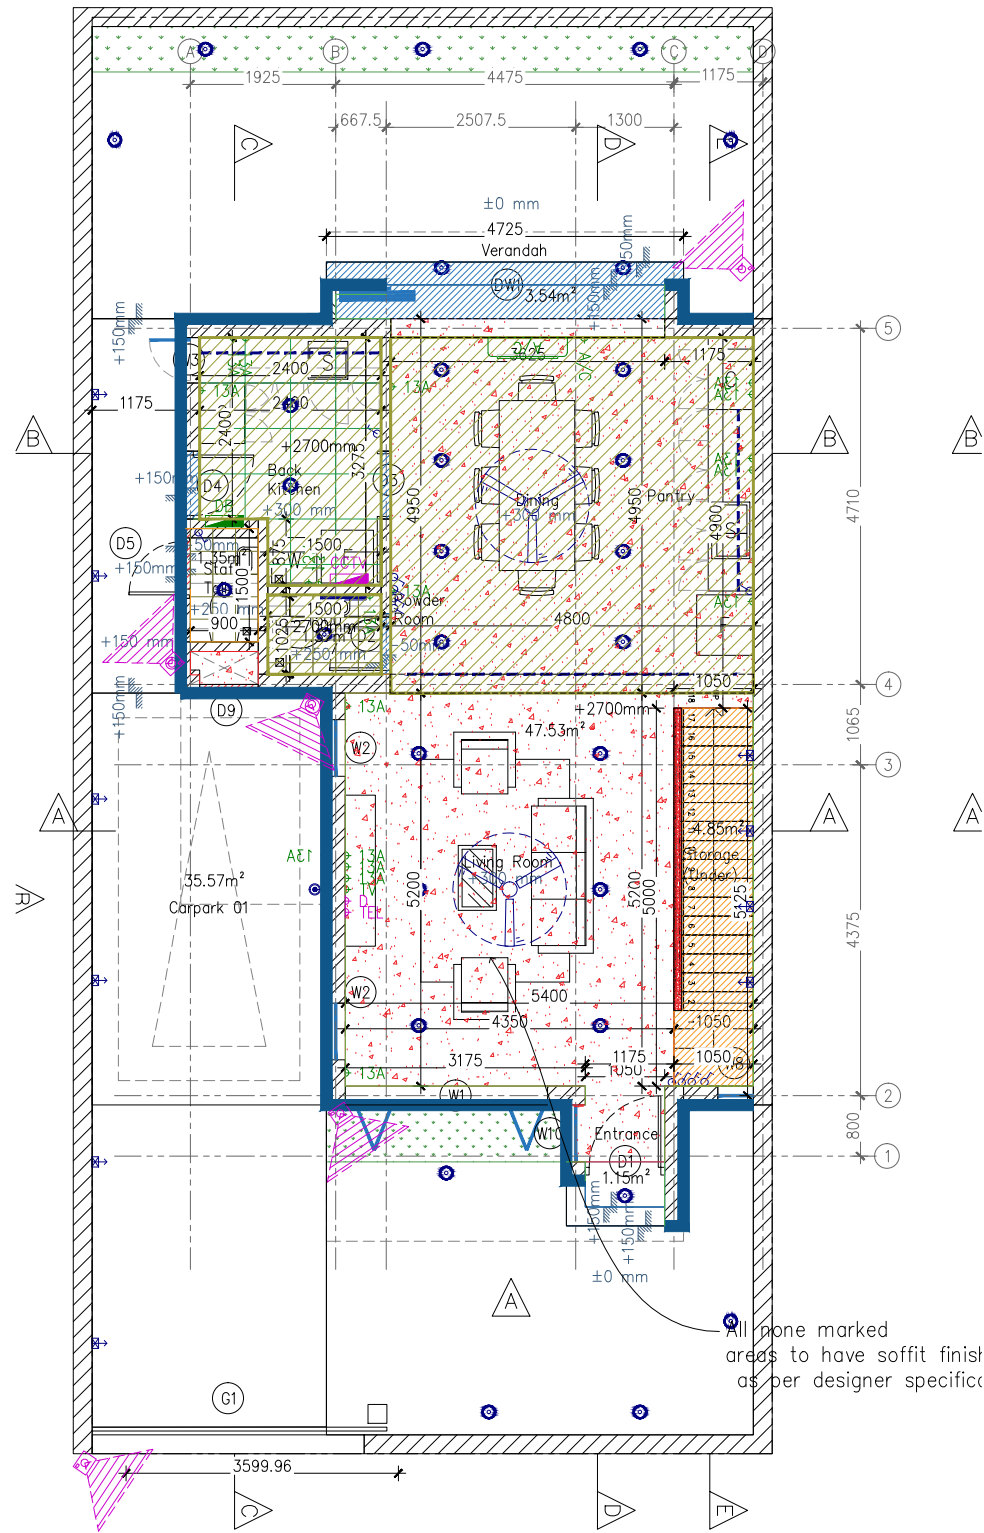






FIRST FLOOR PLAN
1:100

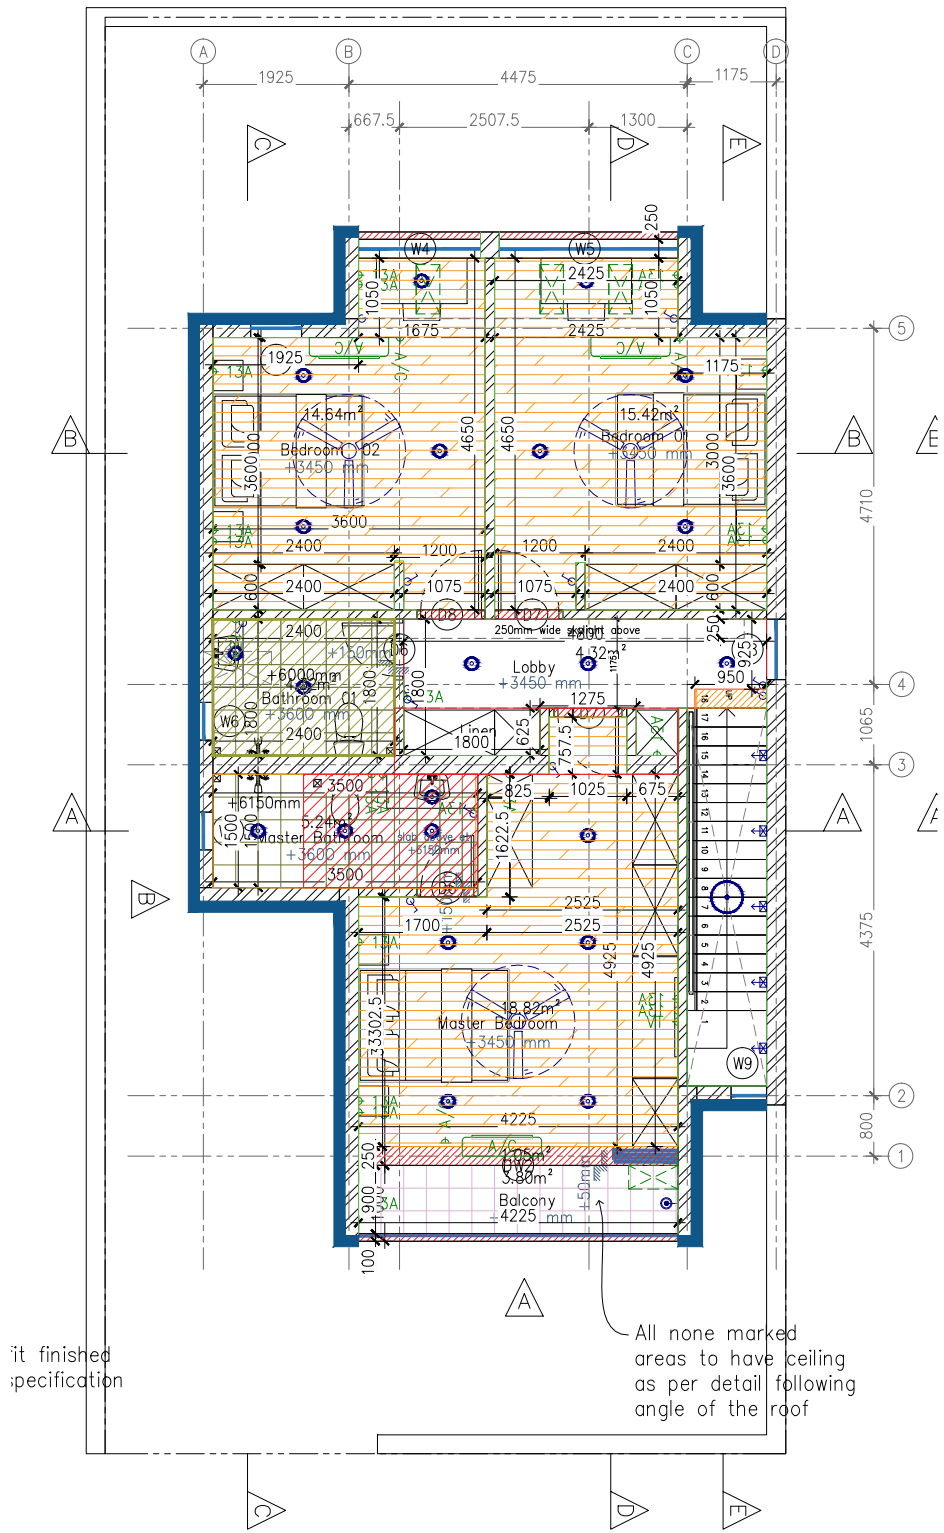

MEZZANINE LEVEL@ +6150mm
FIRST FLOOR PLAN
1:100

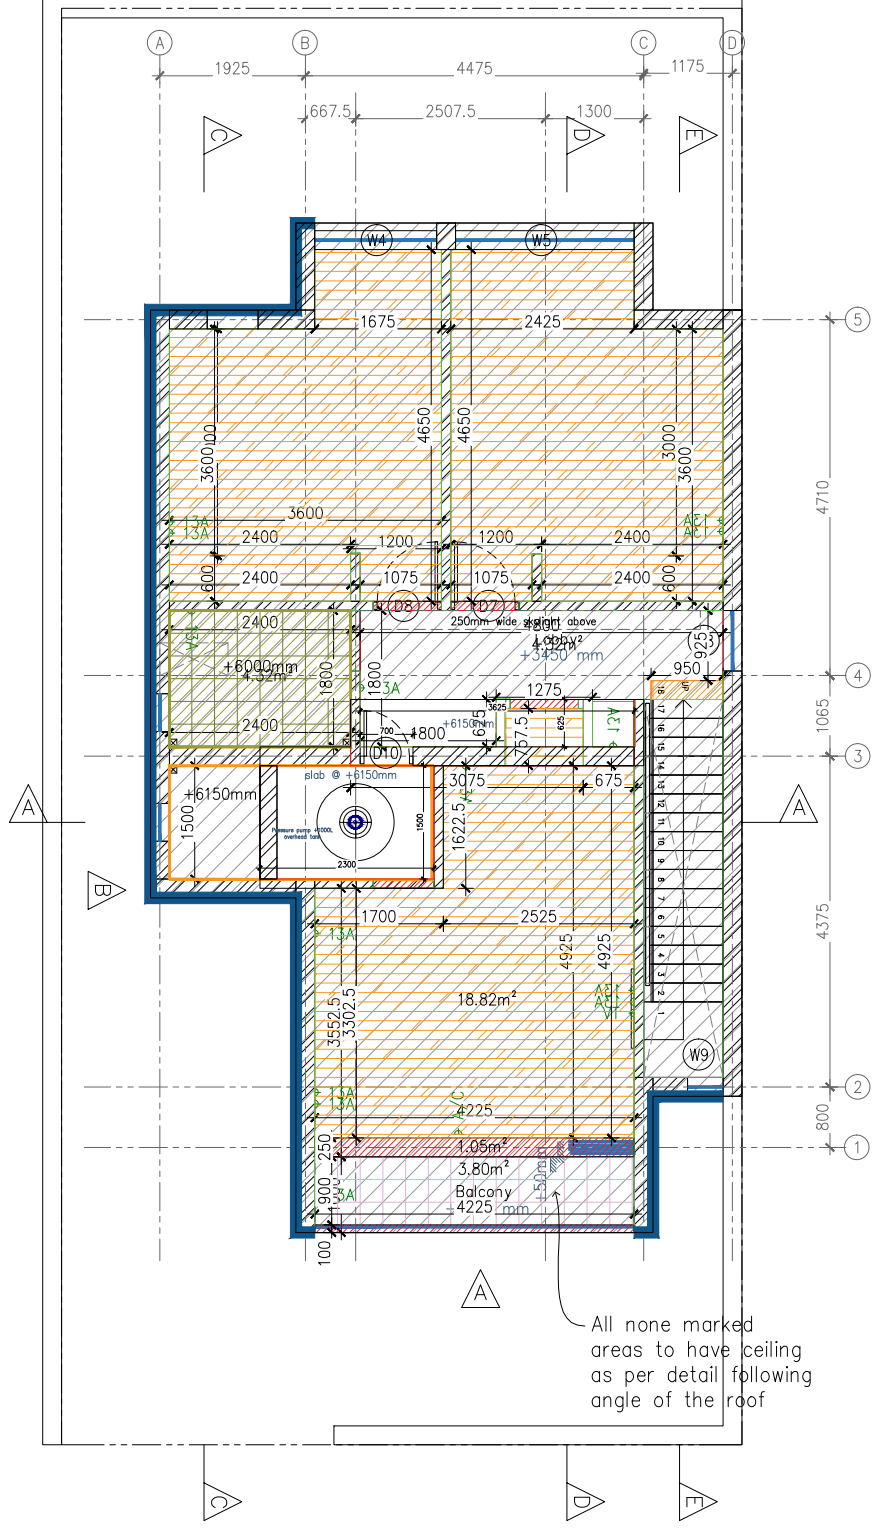



ROOF PLAN
1:100

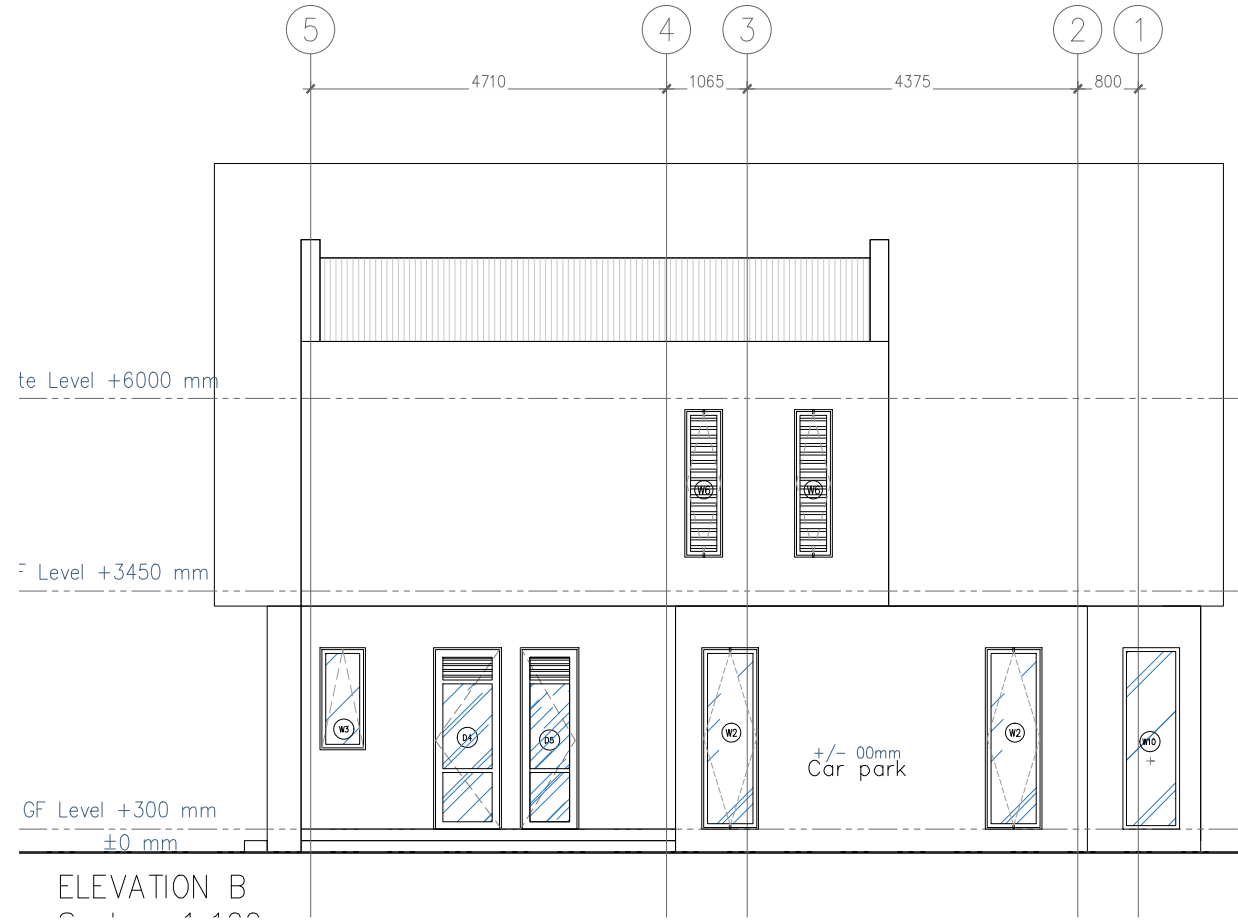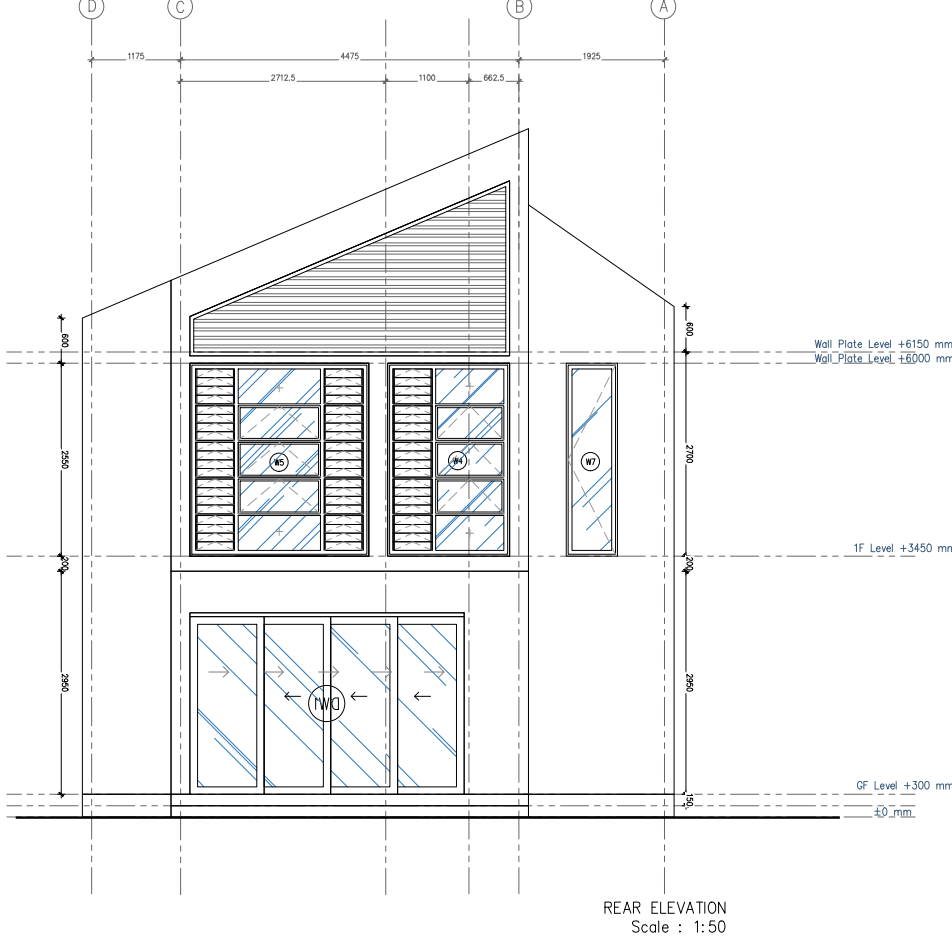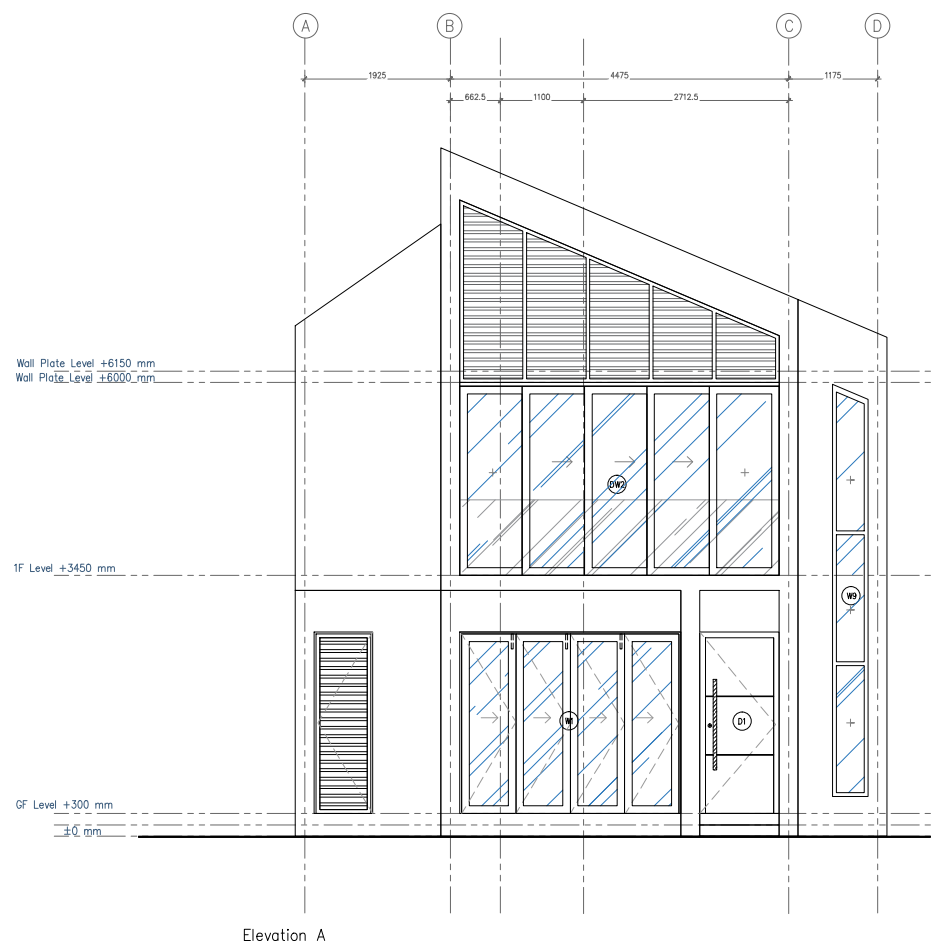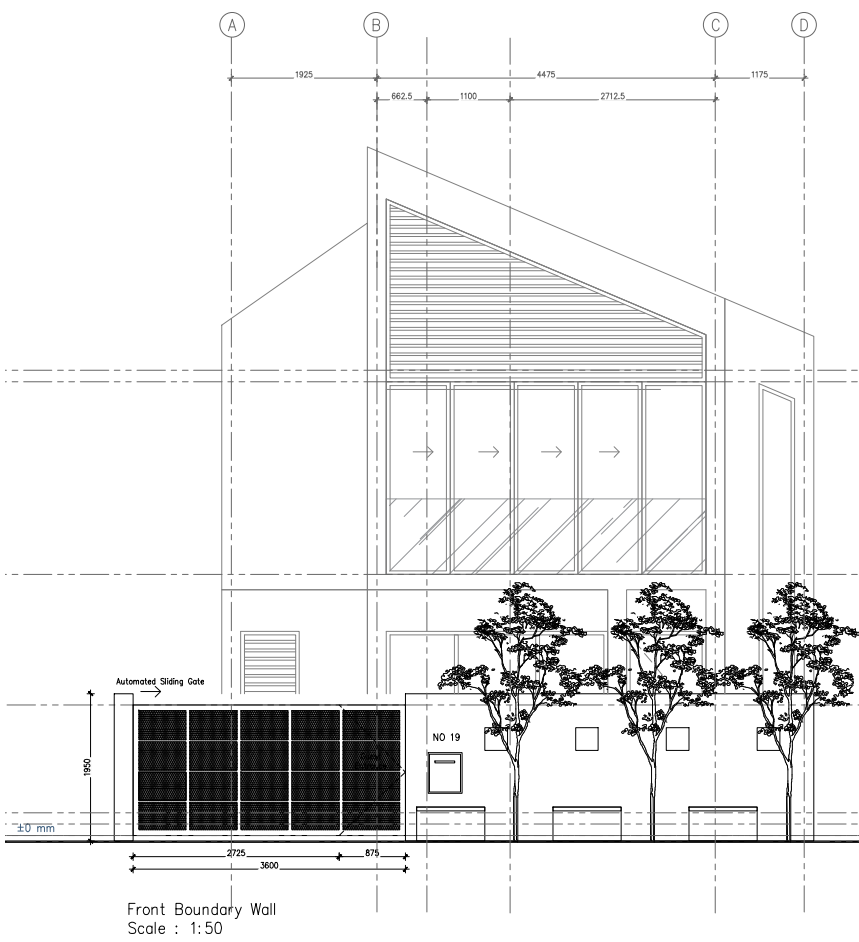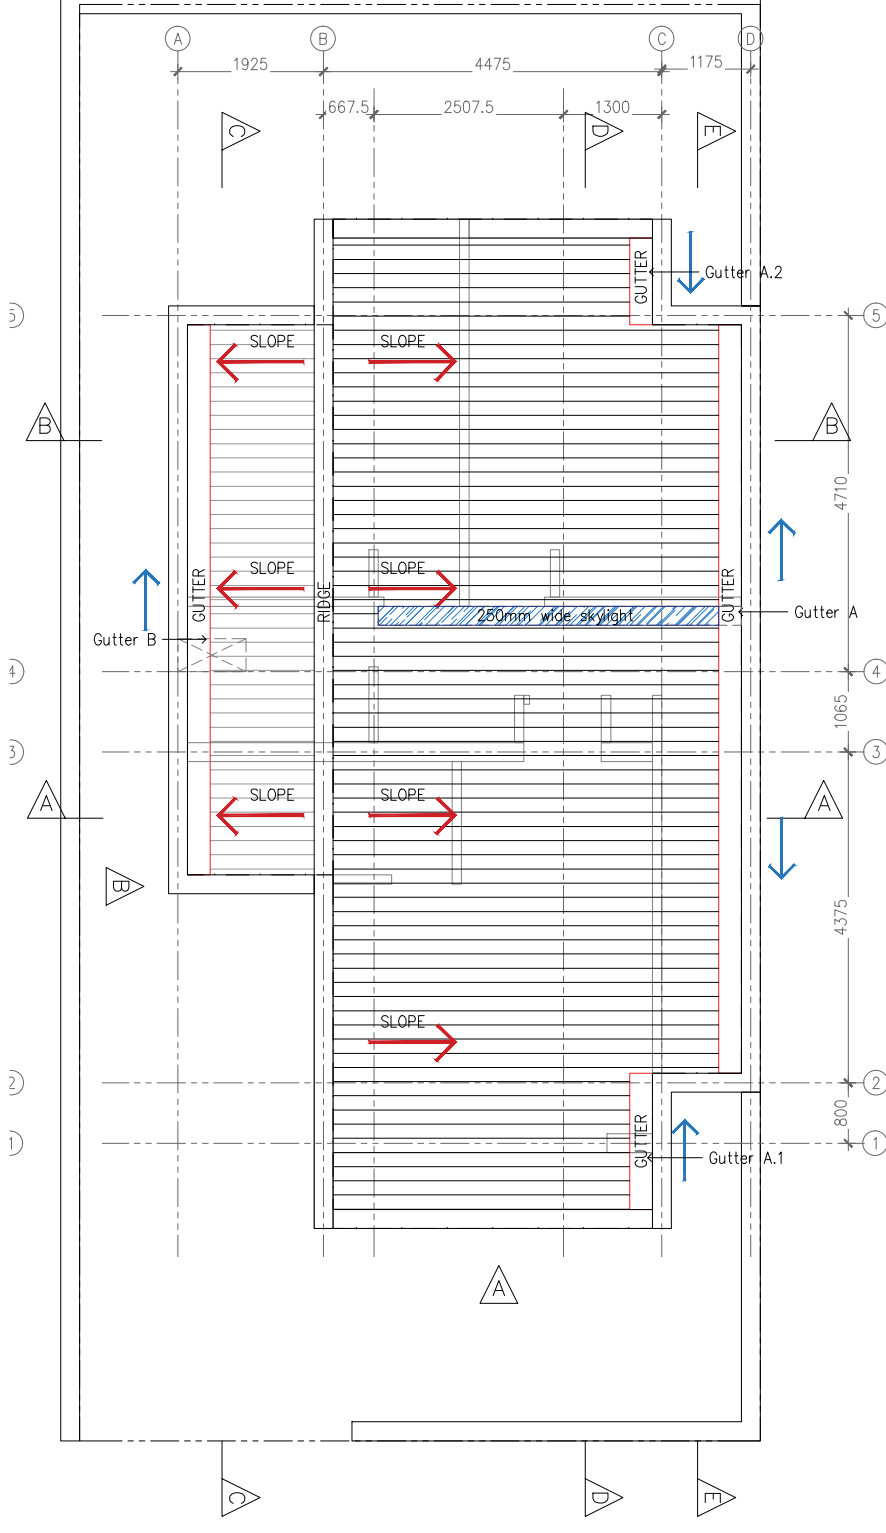

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	PLAN AND ELEVATION (1:100)
Drawing No.	QS2111/CW/ARC-01a

GROUND FLOOR PLAN
1:100


FIRST FLOOR PLAN
1:100

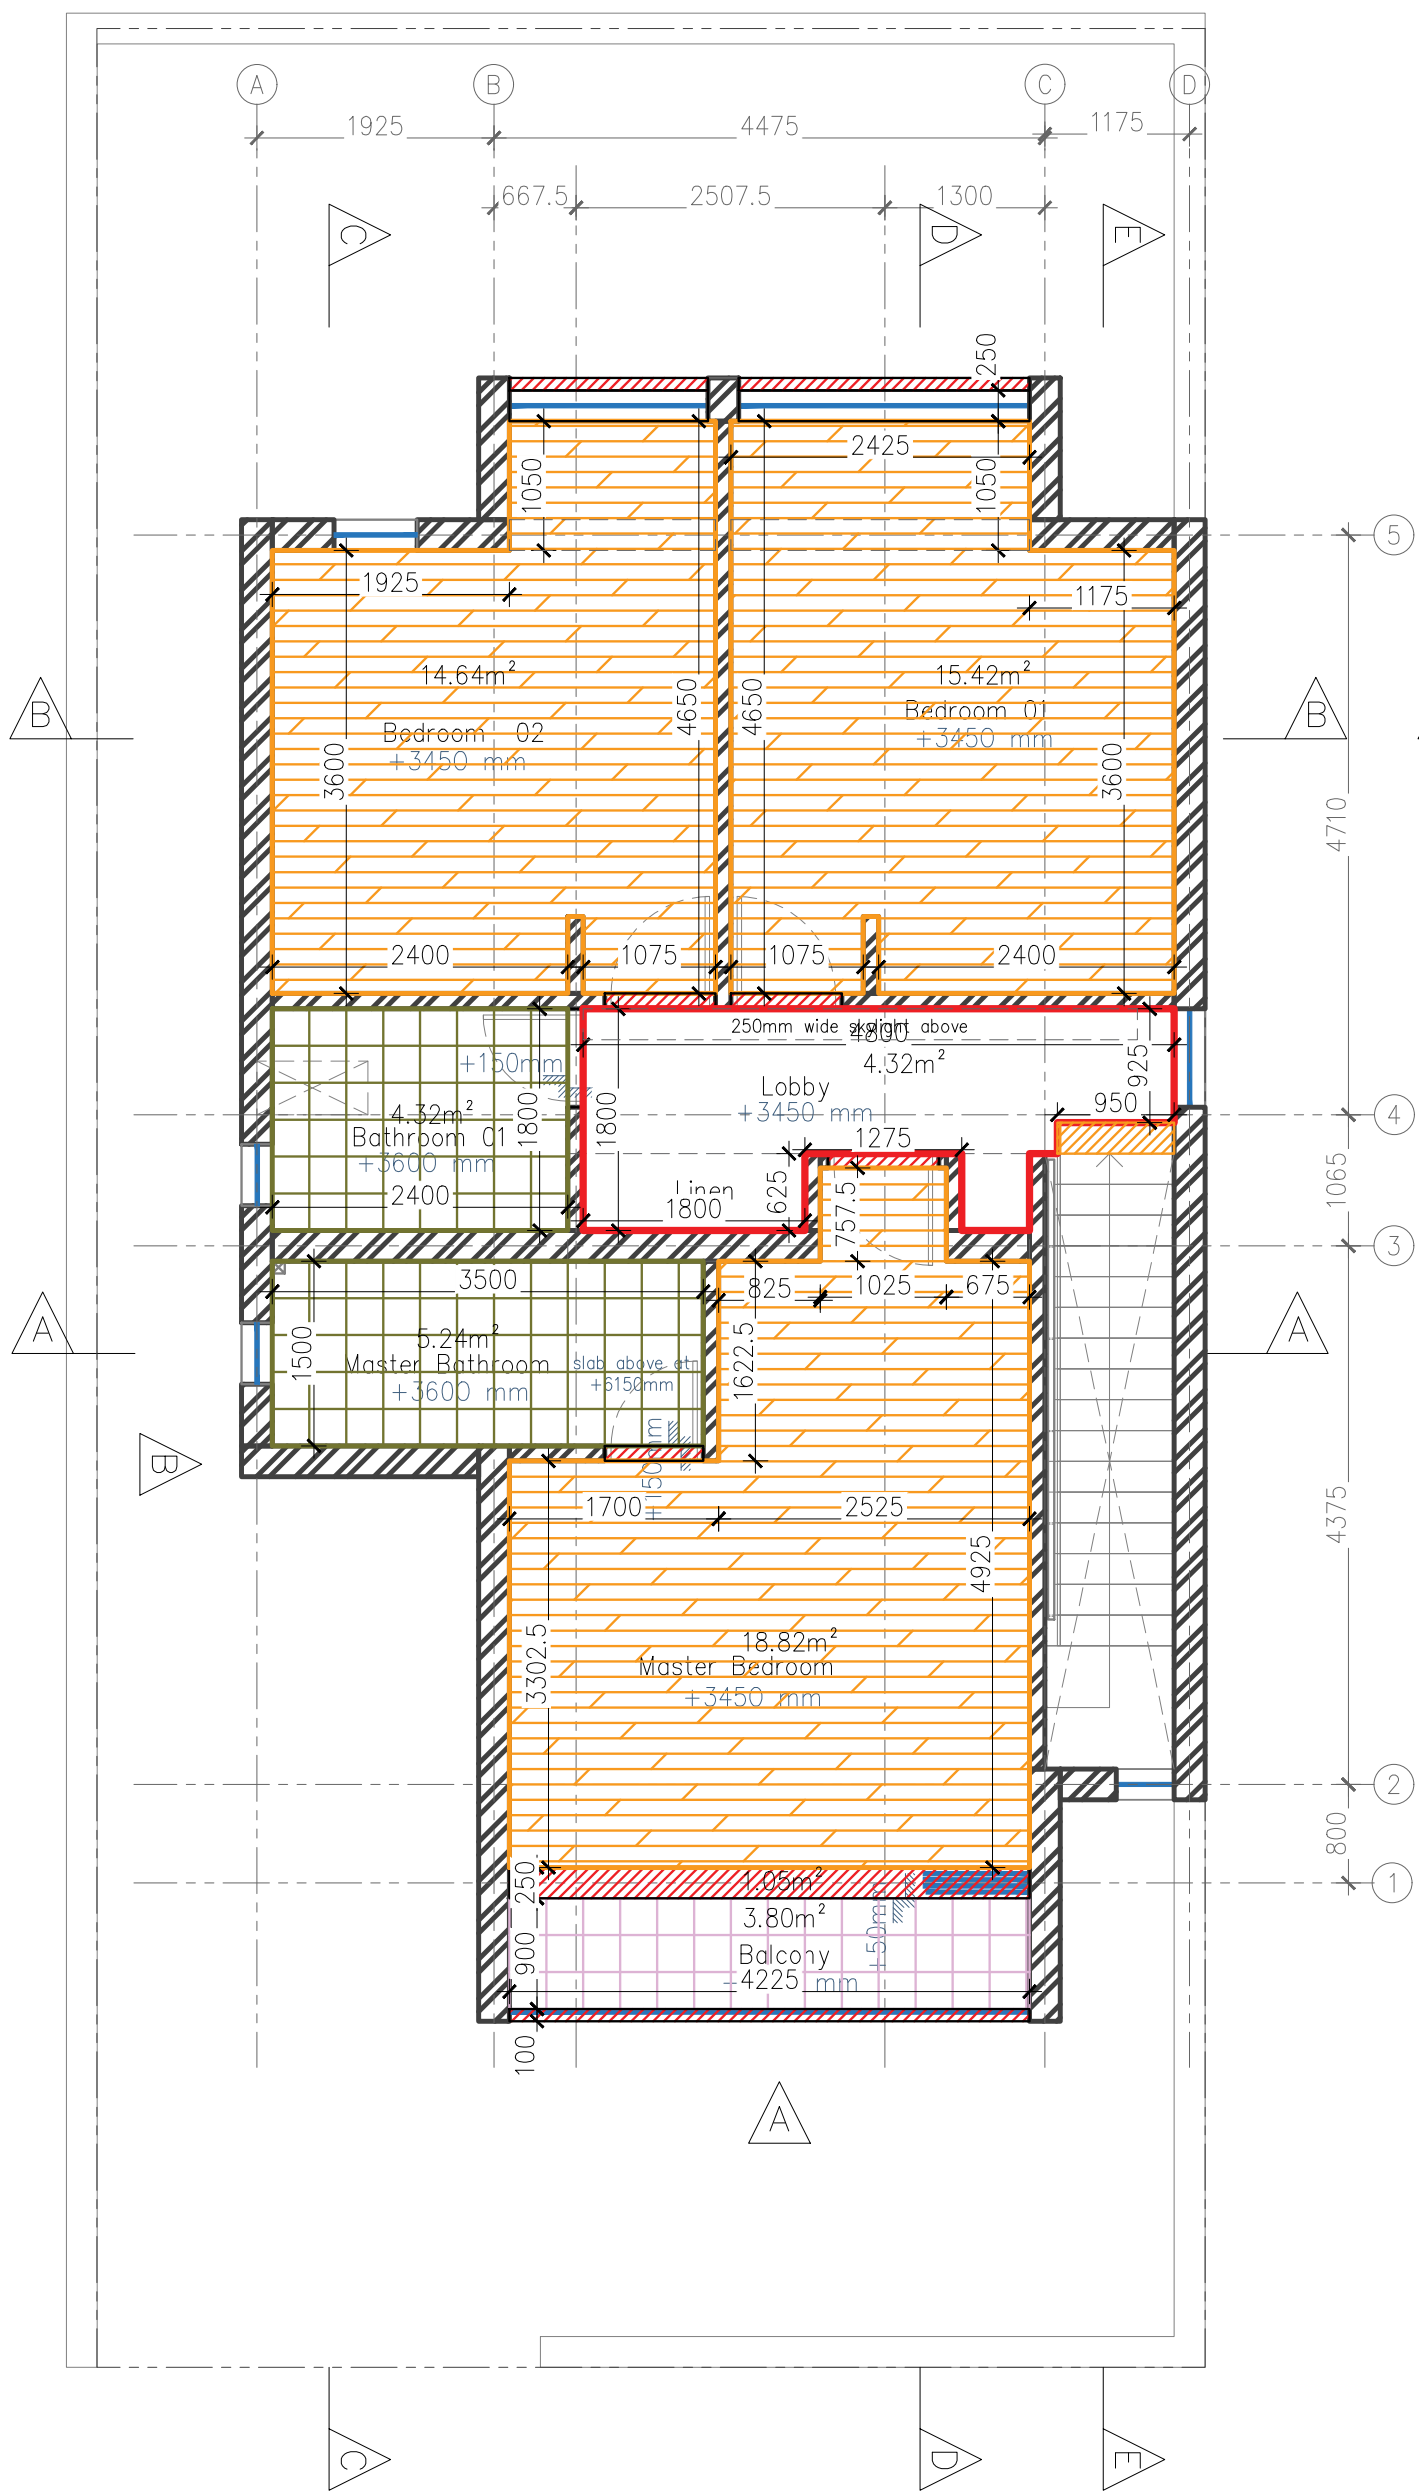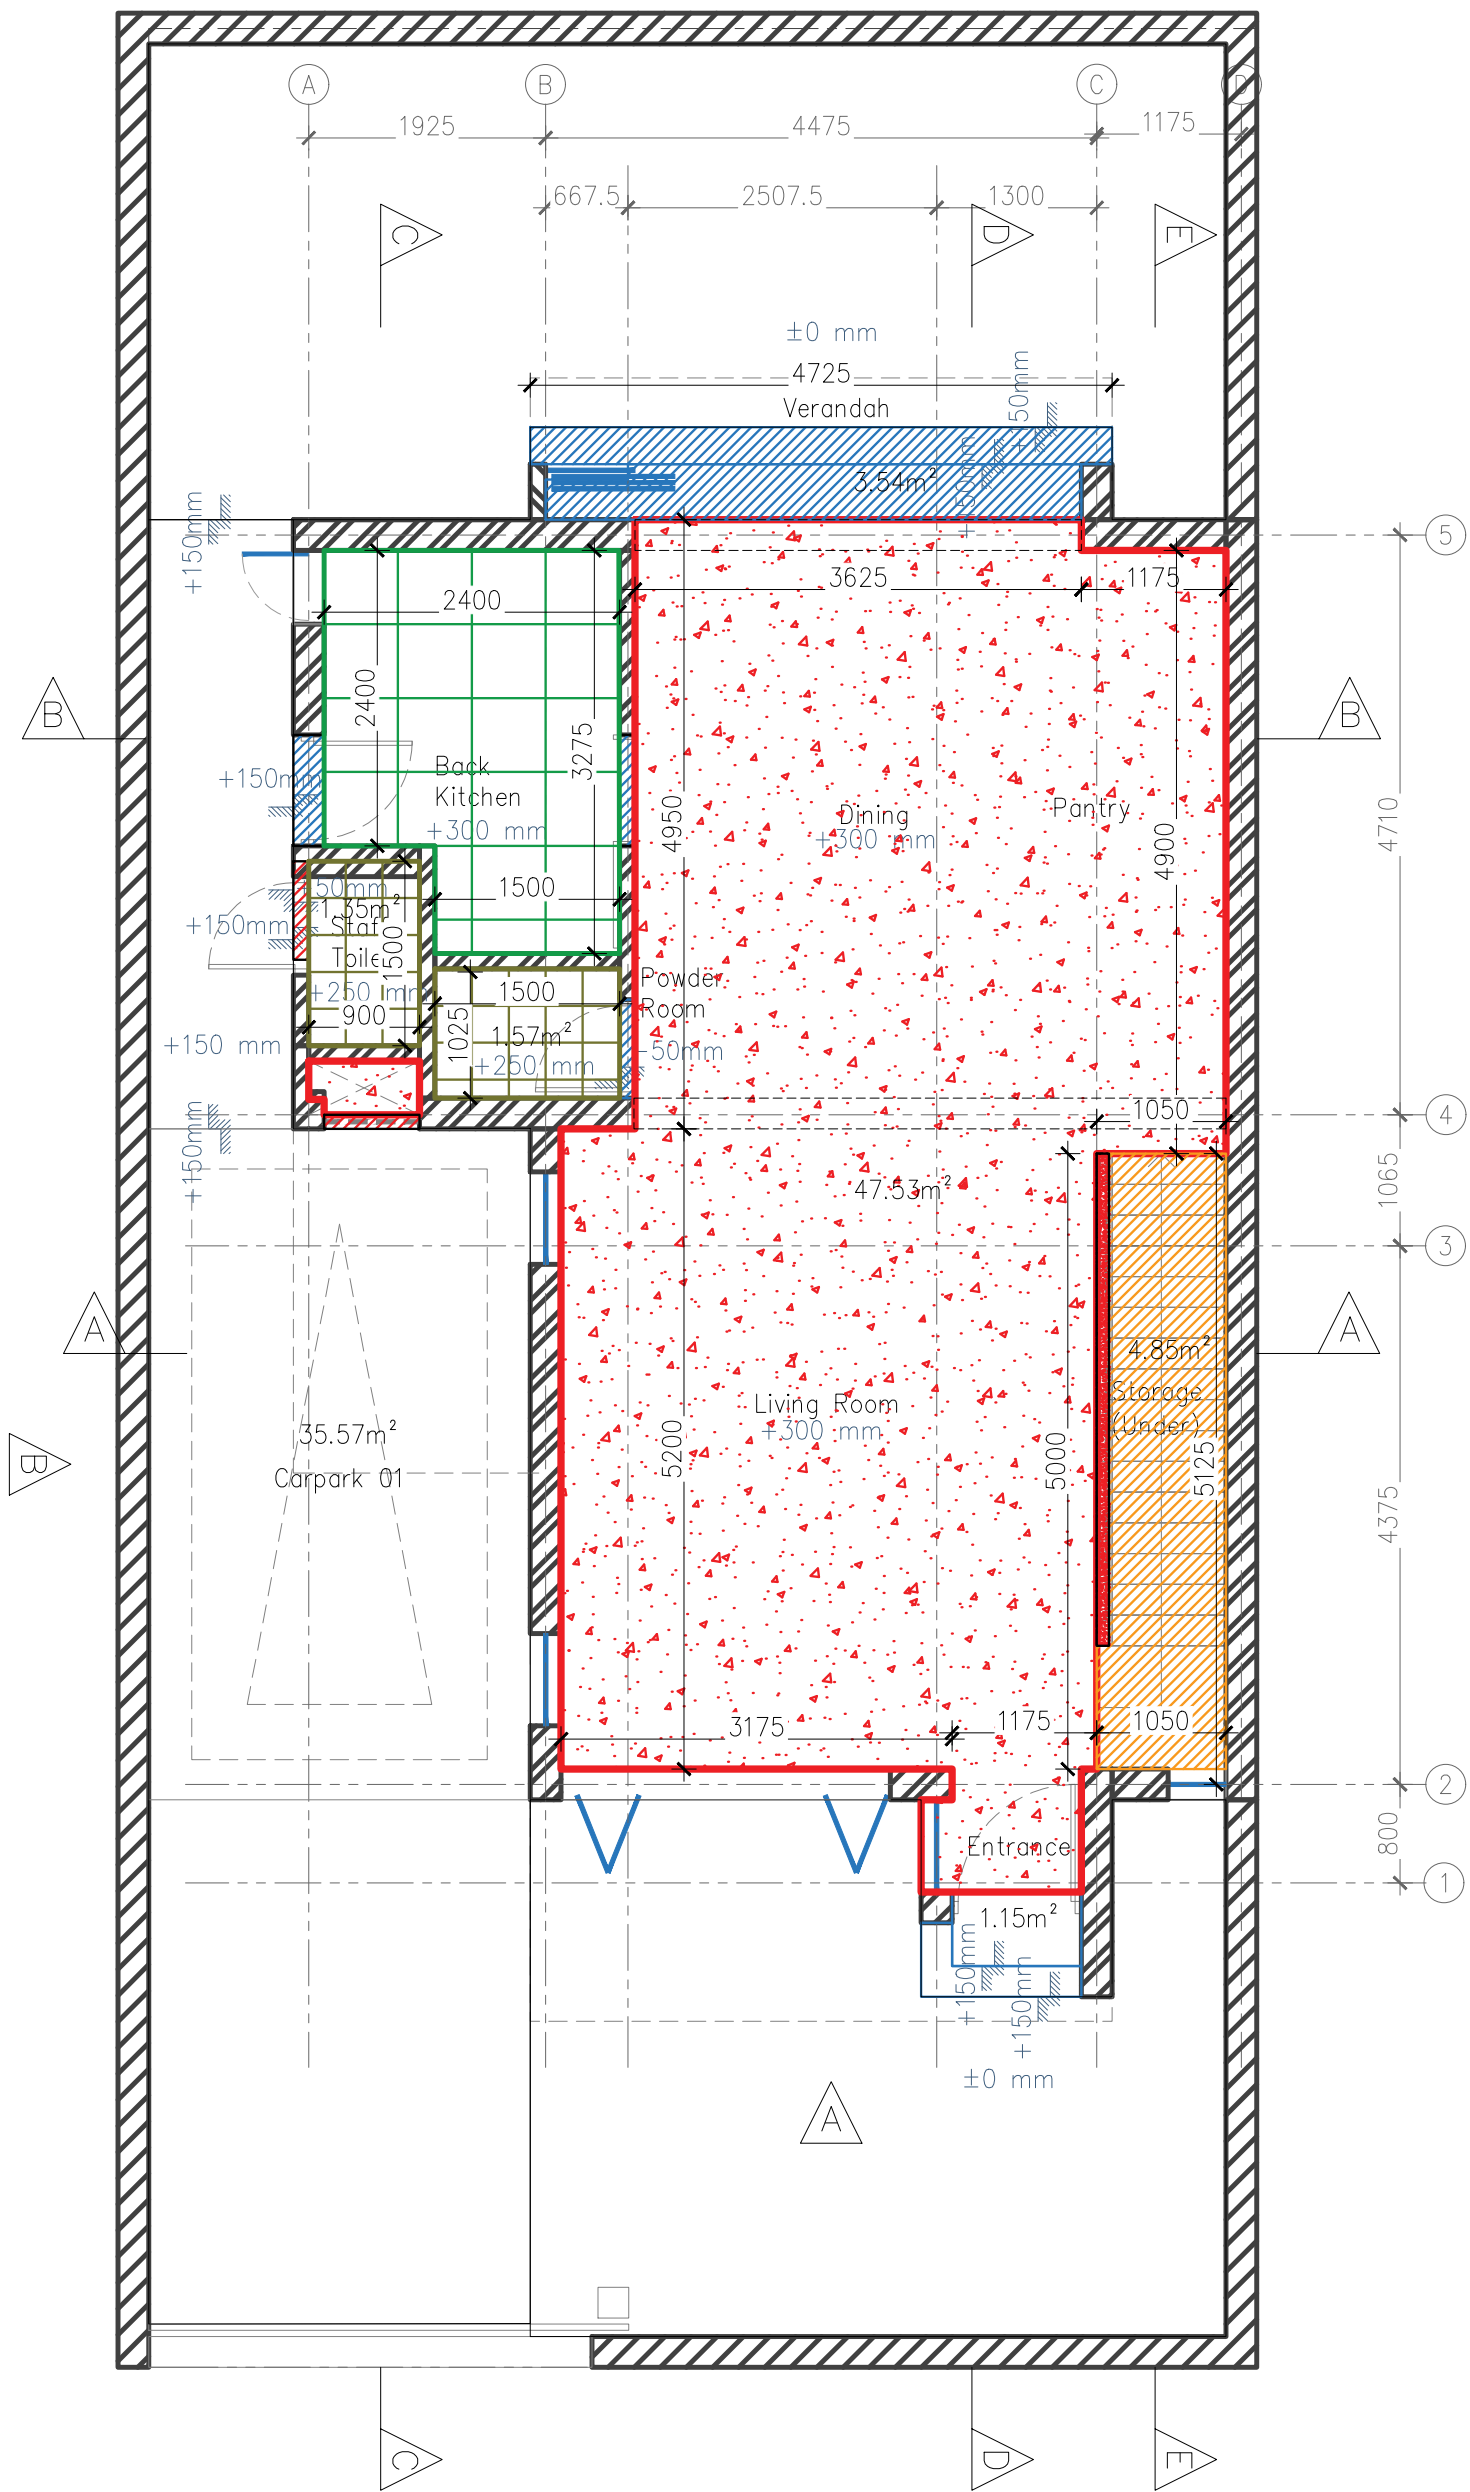


Key (Floor Finishes):

- Hardwood Timber Finish
- Cut & polish super titanium cement floor
- Cut & polish titanium cement floor +75mm FFL
- Laminate Timber flooring as per architect's specification
- 600x600 Homogenous tile – A
- 300x300 Homogenous Tile – A
- Threshold leather finished granite
- Threshold rough cement with glass strips
- 100x100 Cement paving stone
- 300x300 Homogenous Tile – B
- Landscaping

GROUND FLOOR PLAN
1:100

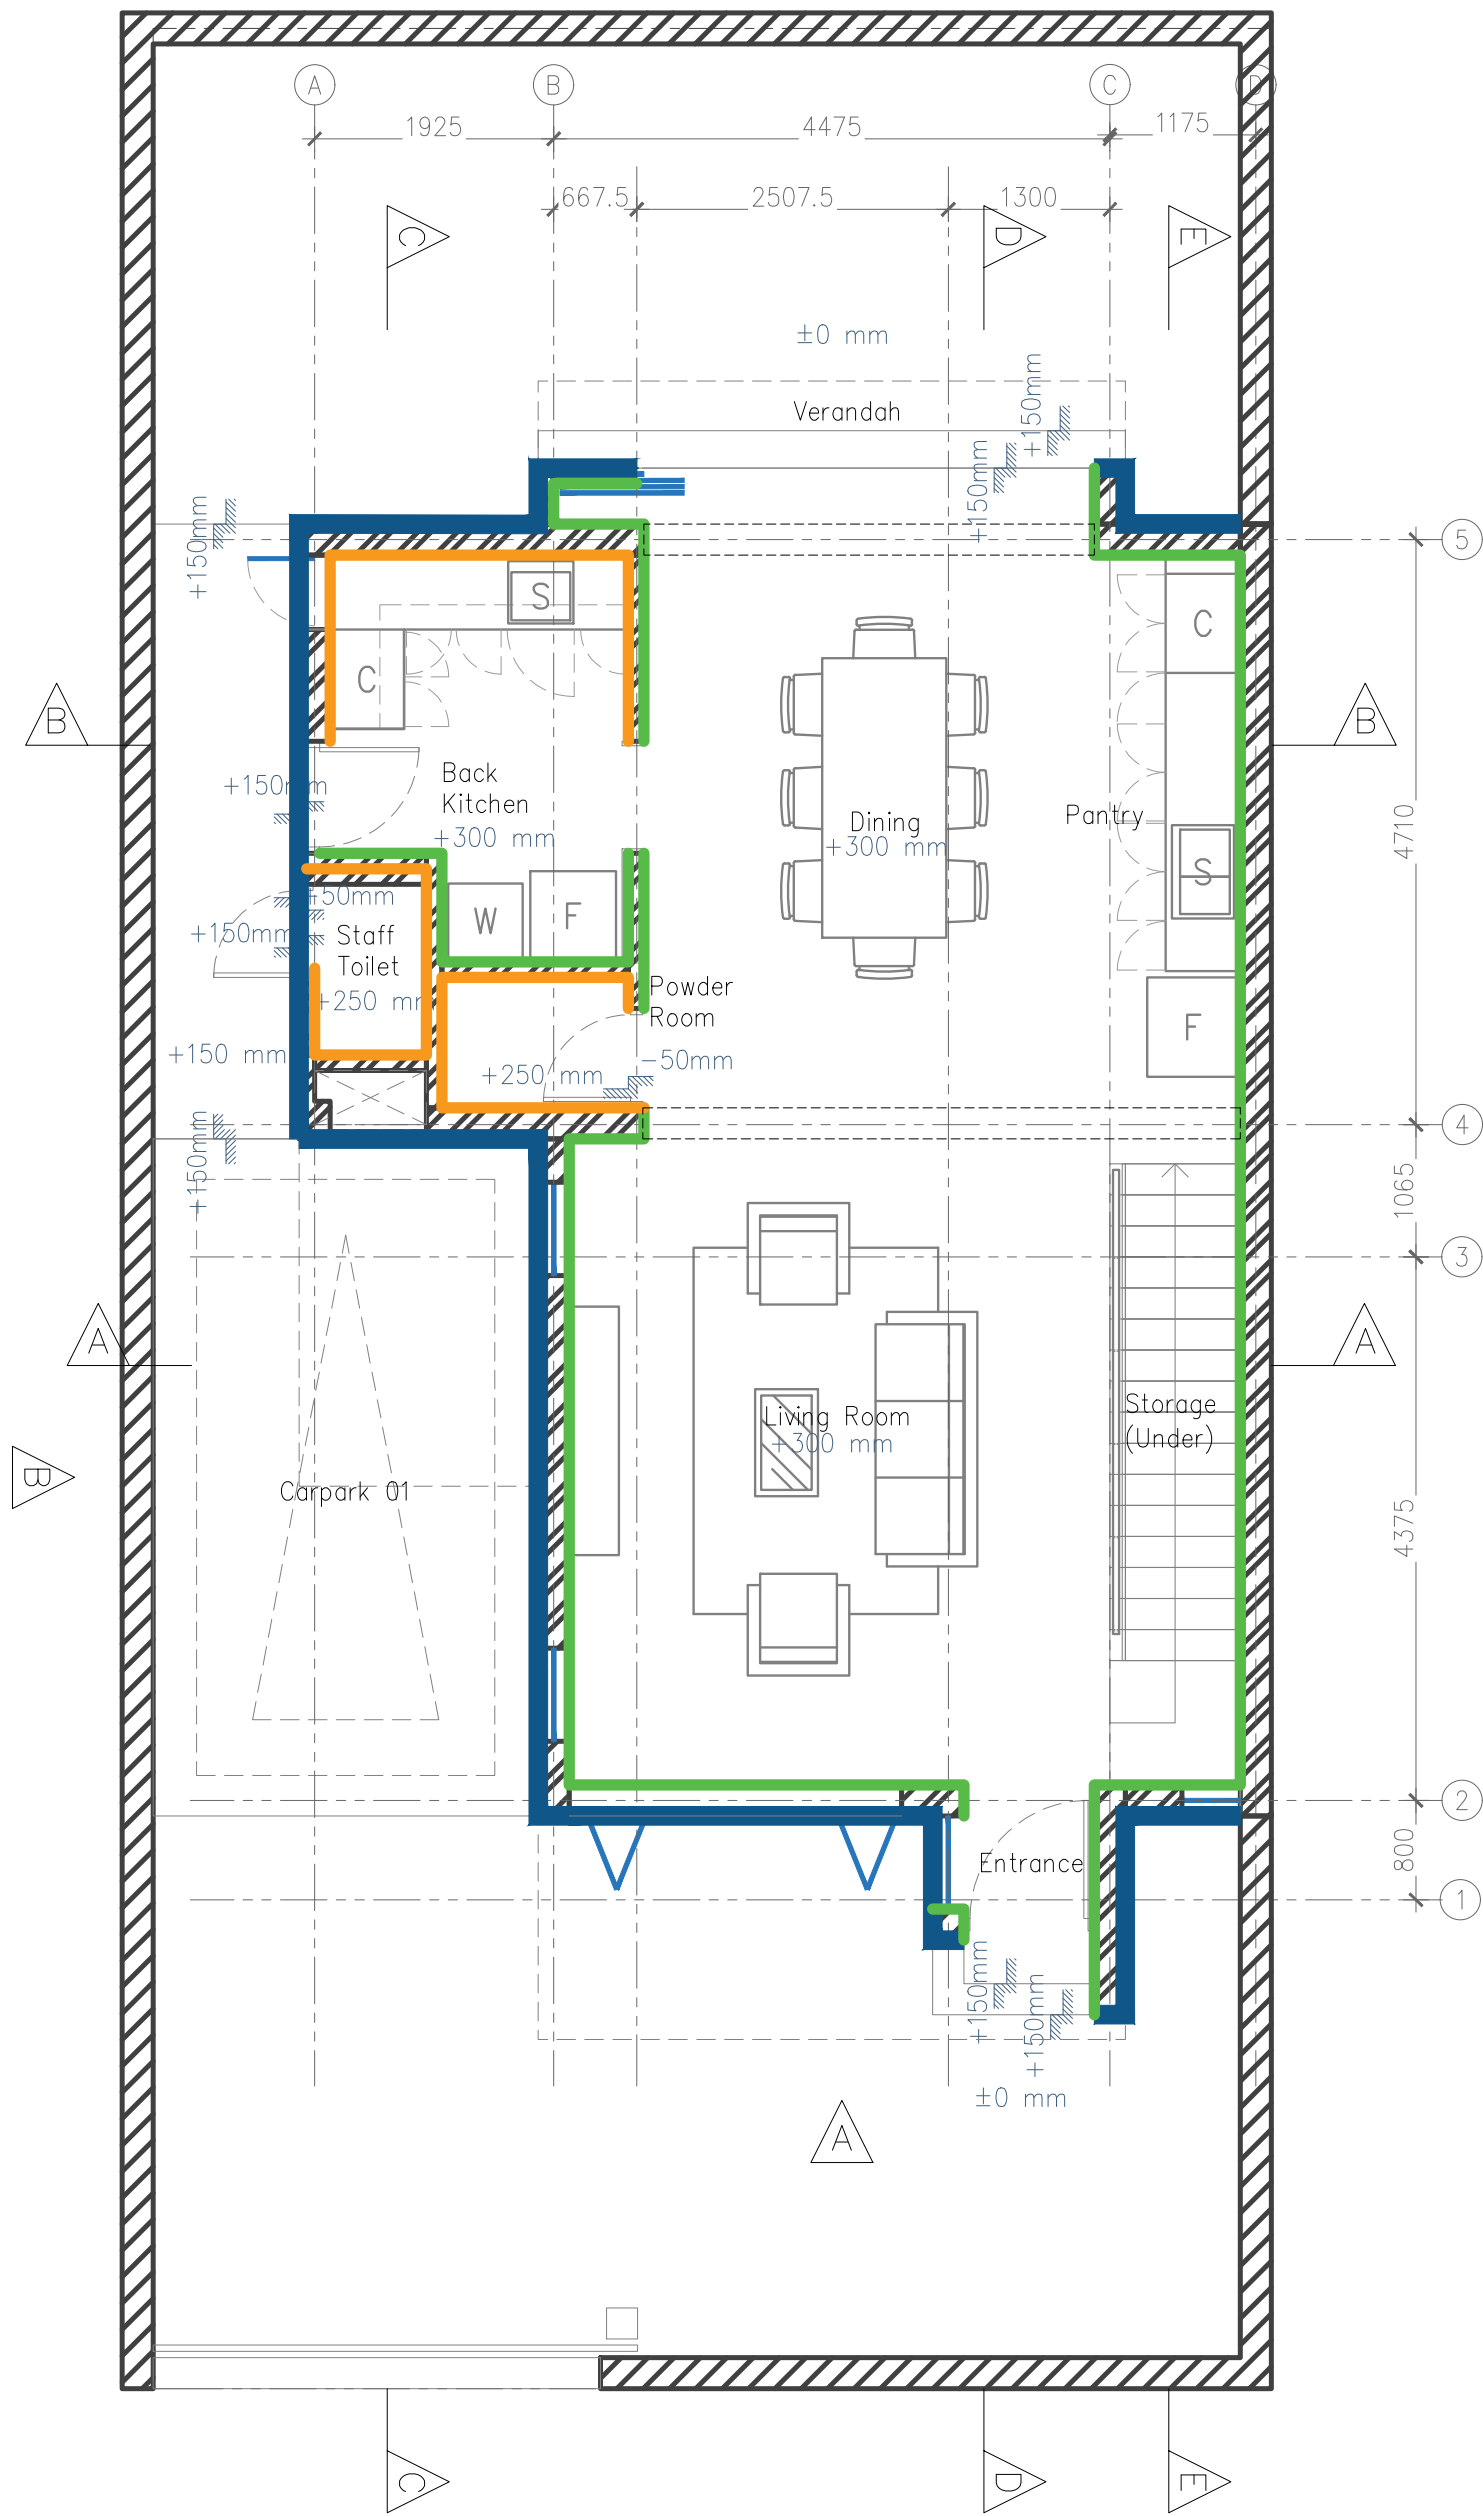



FIRST FLOOR PLAN
1:100

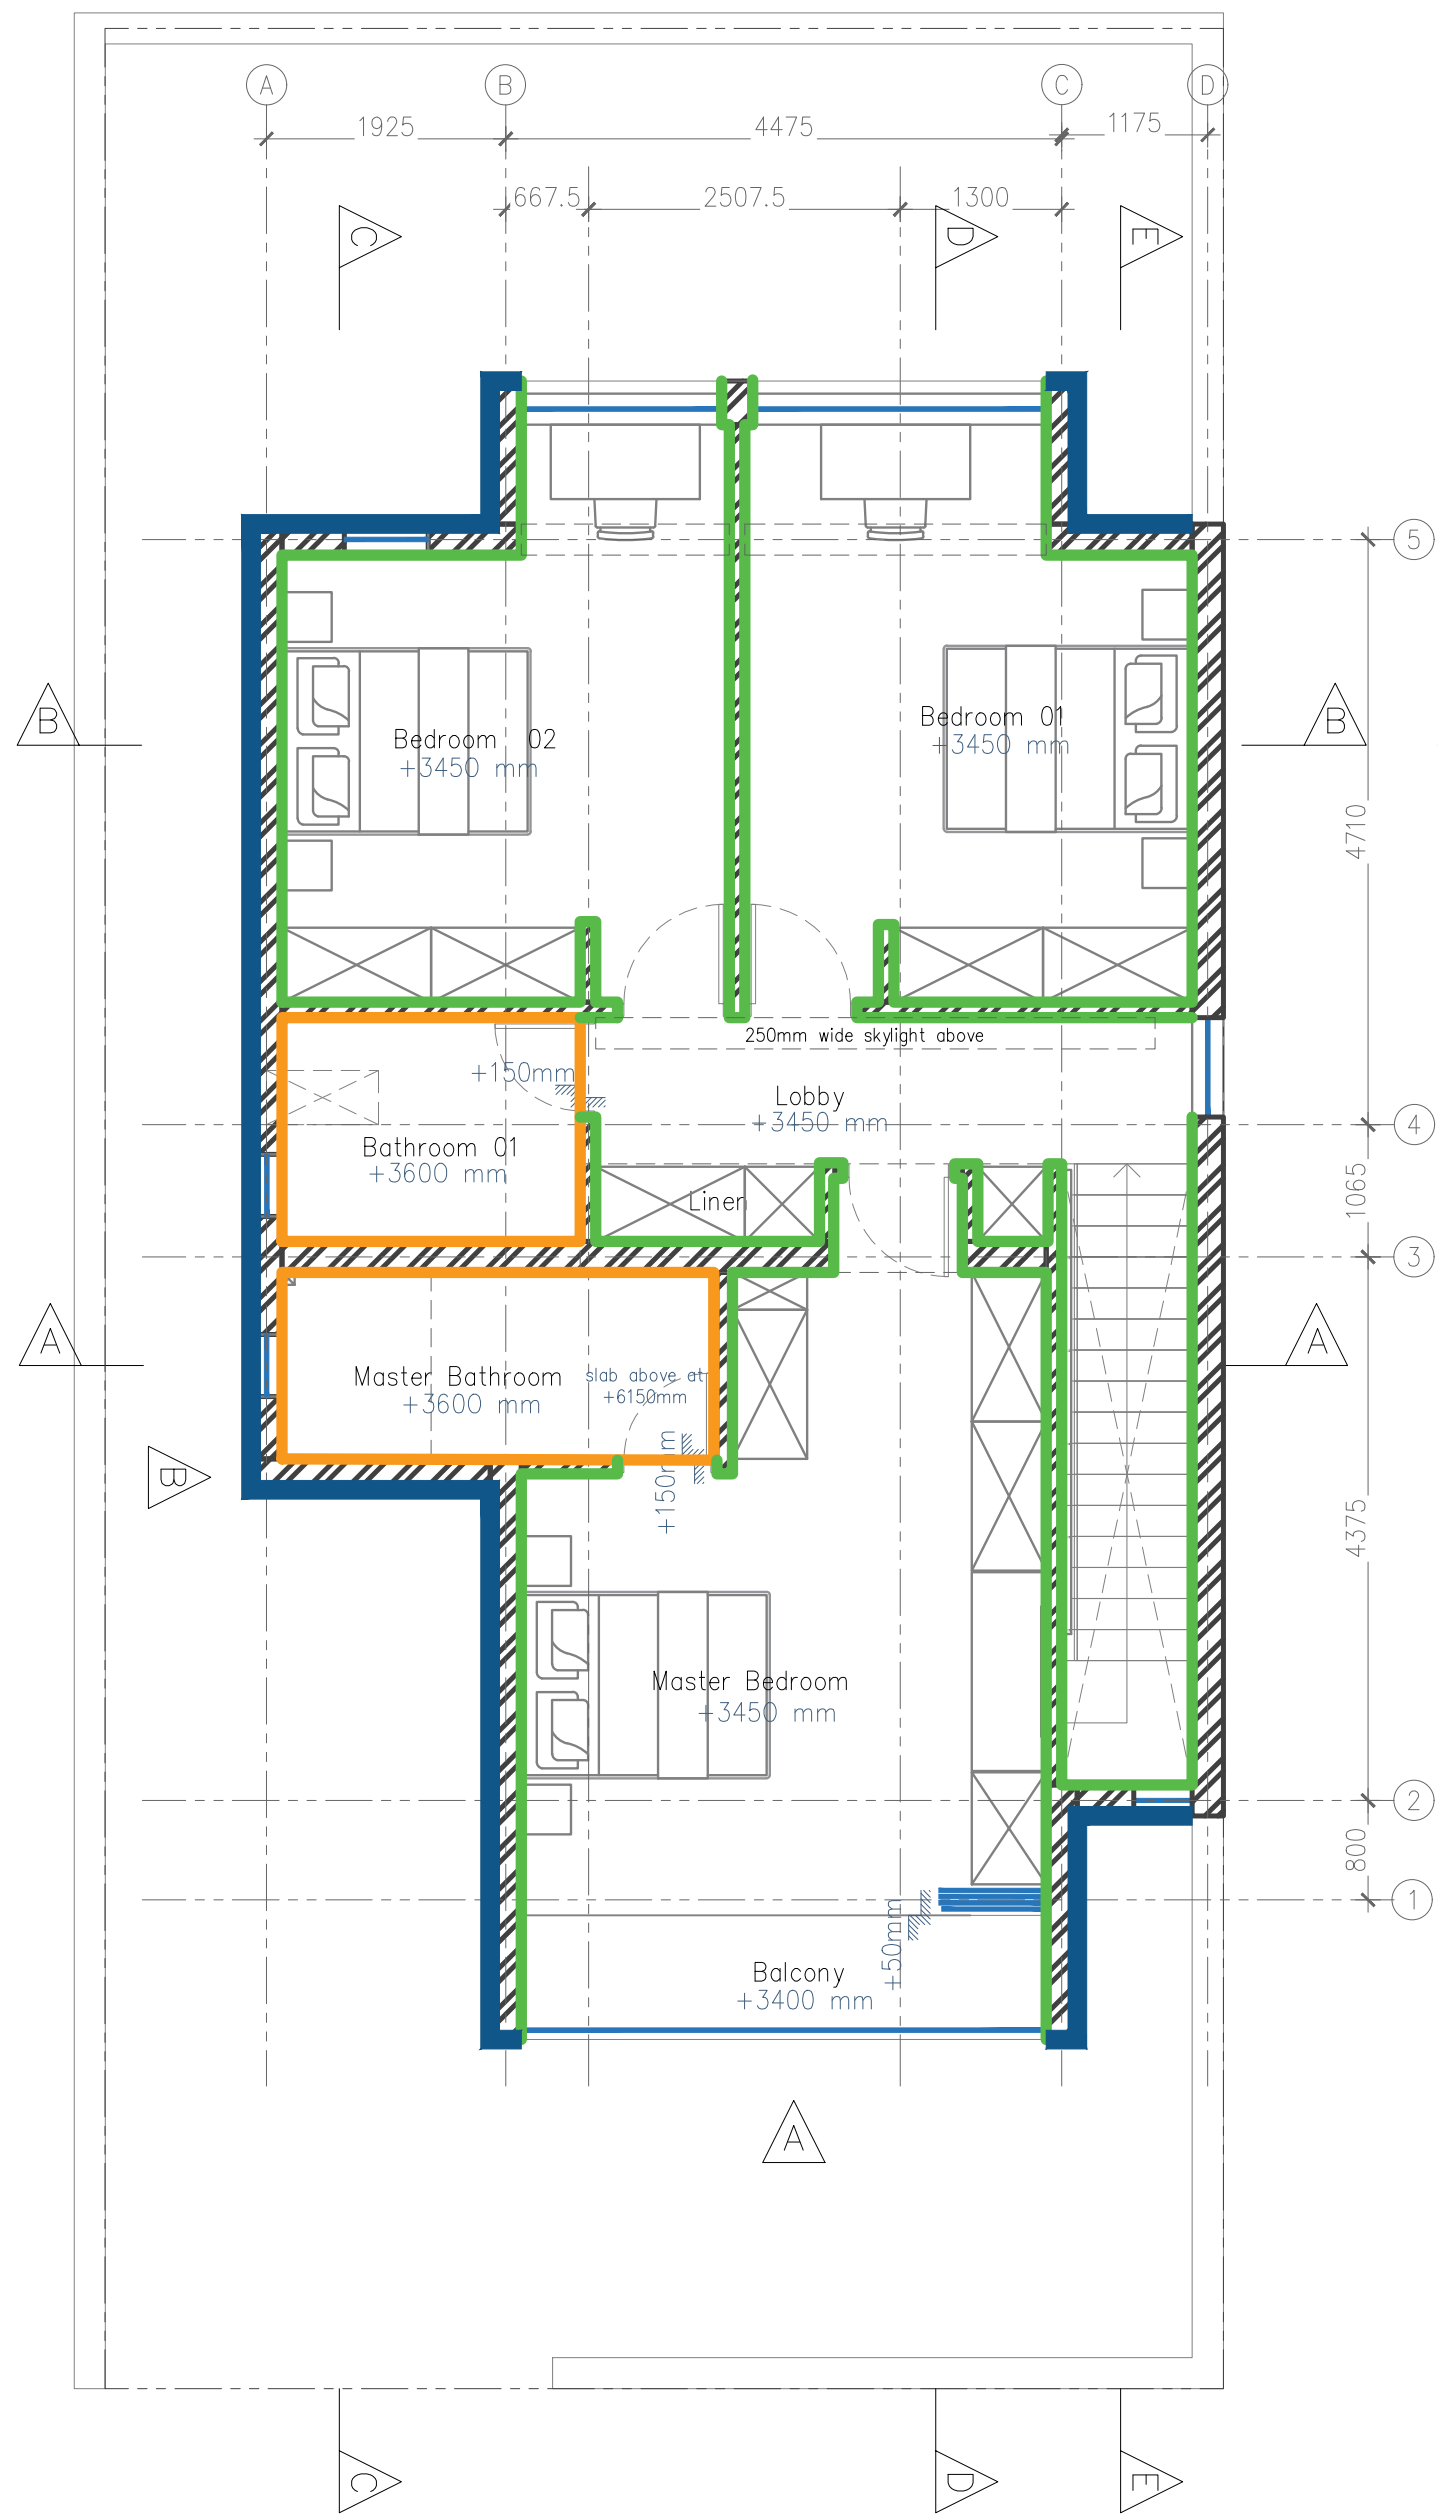

- Key (Wall Finishes):
- Homogenous Tile finish
 - Grey putty or cementitious wall finish to be cut and polished using clear coat sealer.
 - External wall to be putted and painted with 2 coats of appropriate paint as per architect's specification.
 - Internal wall to be putted and painted with 2 coats of appropriate paint as per architect's specification.

GROUND FLOOR PLAN
1:100

FIRST FLOOR PLAN
1:100

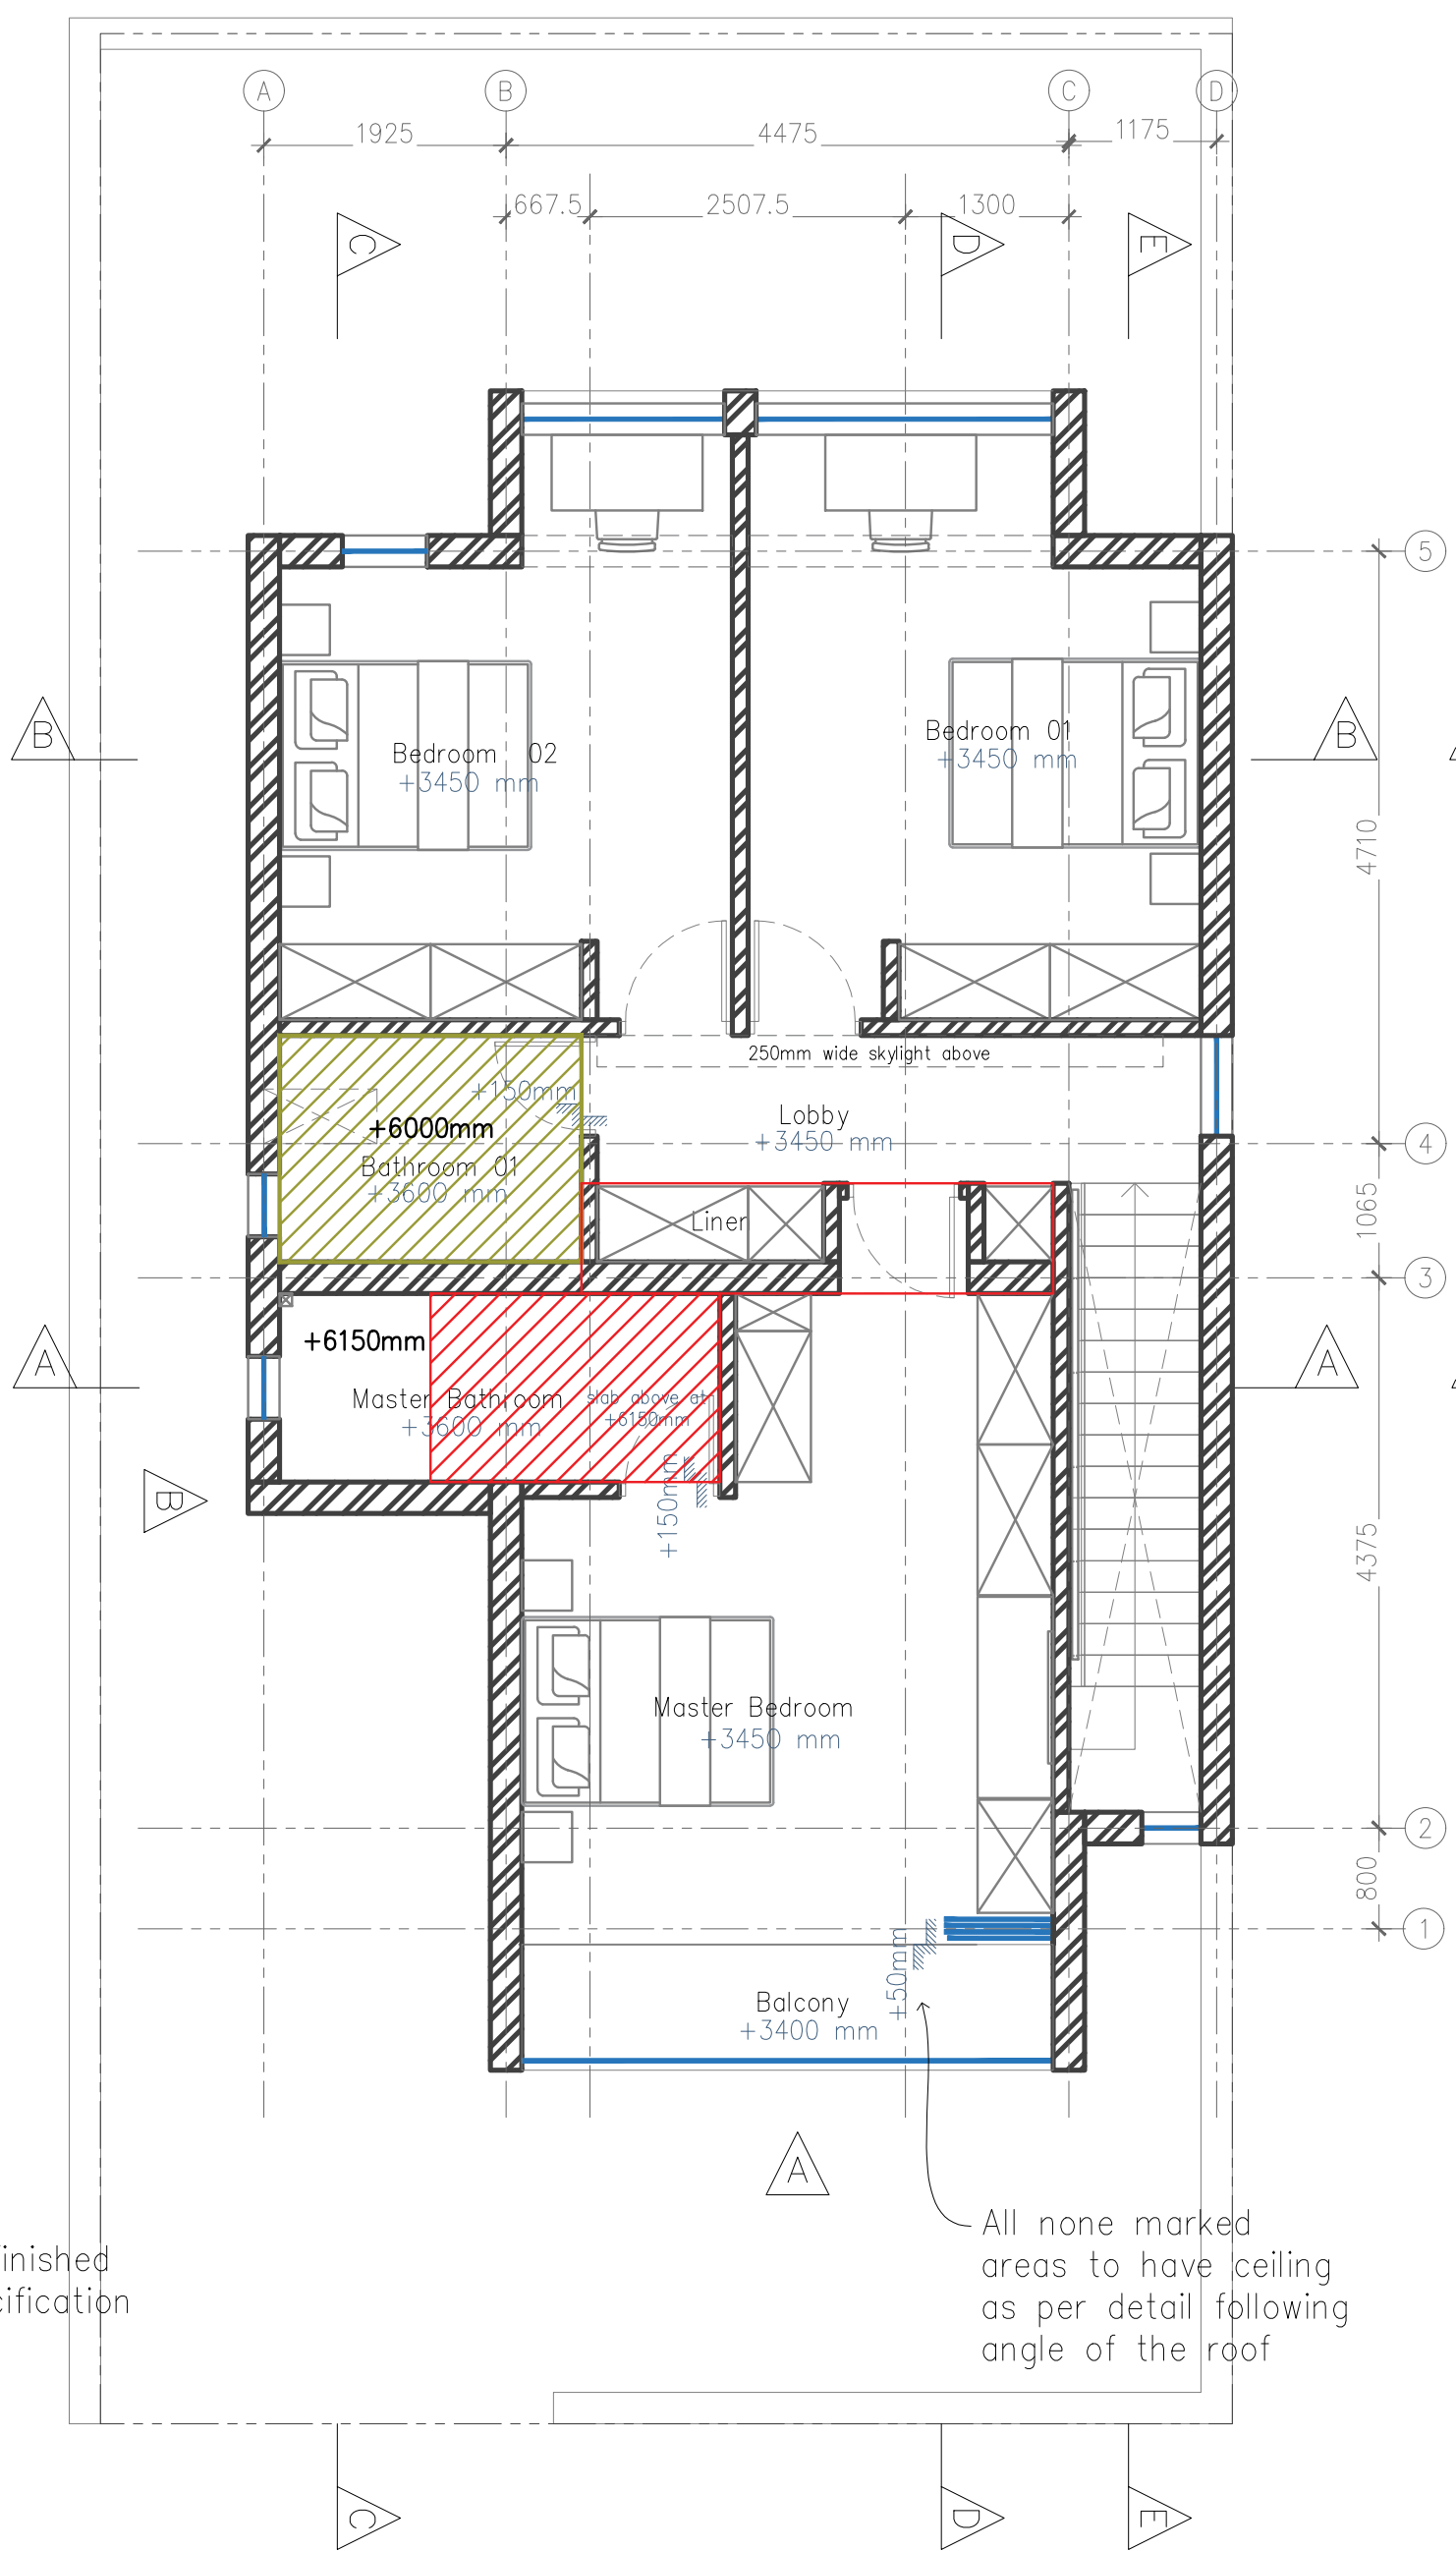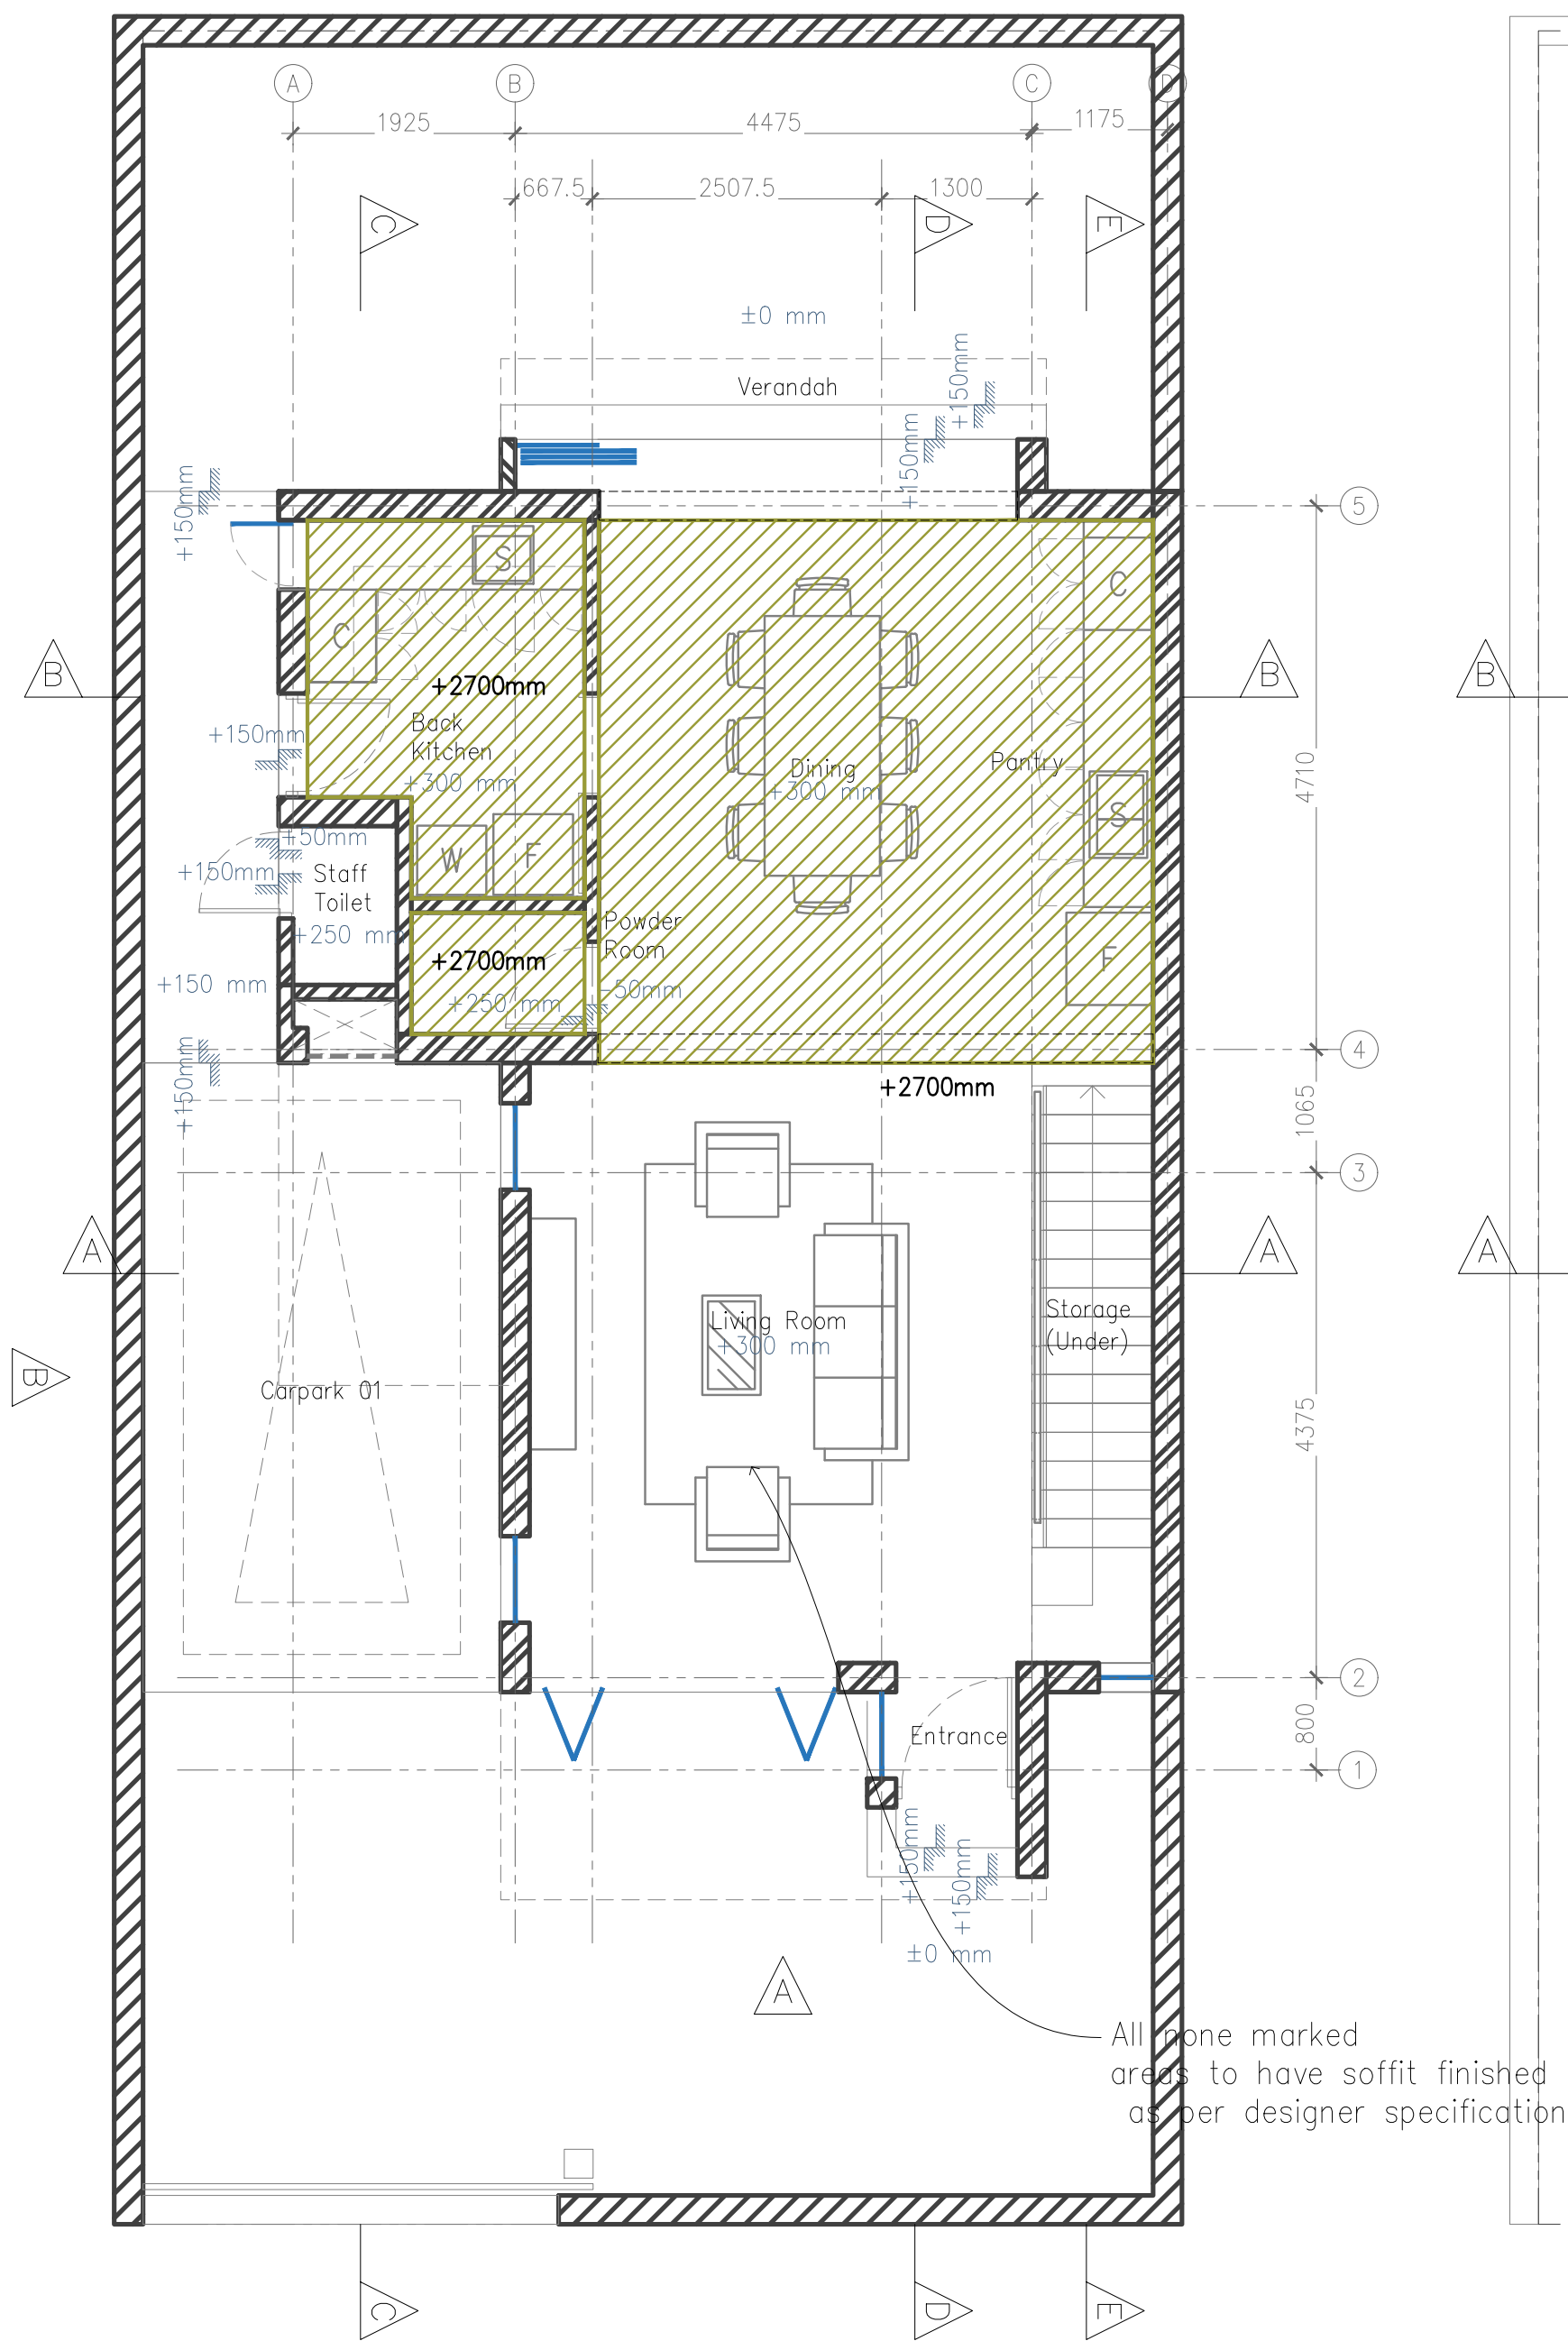

Key (Ceiling Finishes):

- 9mm Gypsum Ceiling
- 150mm thk concrete slab

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	BATHROOM DETAILS (1:100)
Drawing No.	QS2111/CW/ARC-01d



SECTION A-A



SECTION B-B



SECTION C-C



SECTION D-D



SECTION E-E




Staircase 1




Staircase 1




Stalrose 2




(TYPE 1)



(TYPE 2)



-X Section














Detail of pre

PROPOSED HOUSE FOR MR GAMAGE AT MAHARAGAMA


SECTIONS (4.100)

Drawing No. **OS2111/CW/ABC-02**

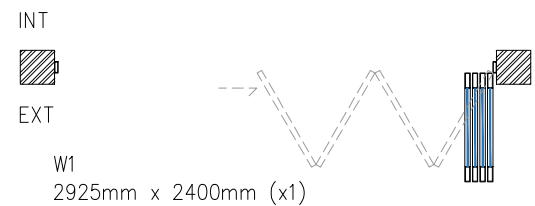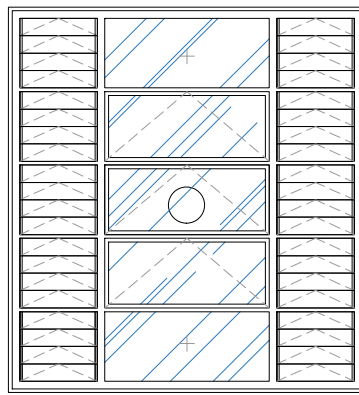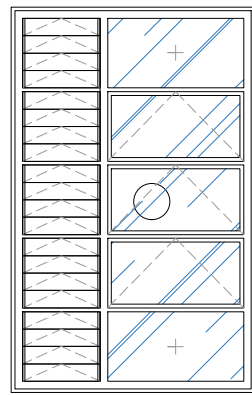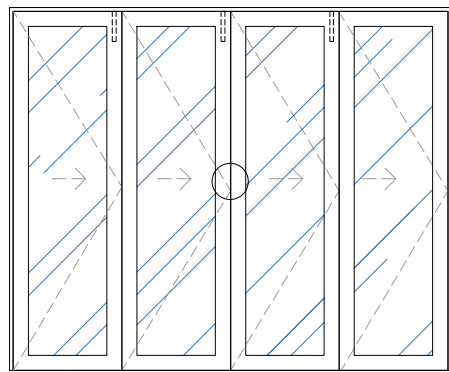


W1
2925mm x 2400mm (x1)

Alumiumm 4-sash sliding folding door with glass panels to open towards a single side as per architect's specification.




W2
750mm x 2400mm (x2)

Alumiumm center pivot window with glass panel as per architect's specification.




W3
600mm x 1350mm (x2)

Alumiumm 1-sash top hung window with glass panel as per architect's specification.




W4
1612.5mm x 2550 mm (x1)

Aluminum operable louvers with glass fins and top hung window as per architect's specification.




W5
2362.5 mm x 2550 mm (x1)

Aluminum operable louvers with glass fins and top hung window as per architect's specification.




W6
500 mm x 1950 mm (x2)

Aluminum center pivot window with fixed louvers as per architect's specification.




W7
675 mm x 2250 mm (x1)

Aluminum glazed window opening outwards as per architect's specification.




W8
800 mm x 2400 mm (x1)

Aluminum glazed fixed window as per architect's specification.








W9
470 mm x 5450 mm (x1)

Aluminum glazed fixed window as per architect's specification.



W10
470 mm x 5450 mm (x1)

Aluminum glazed fixed window as per architect's specification.

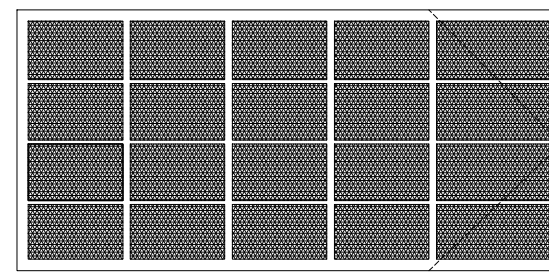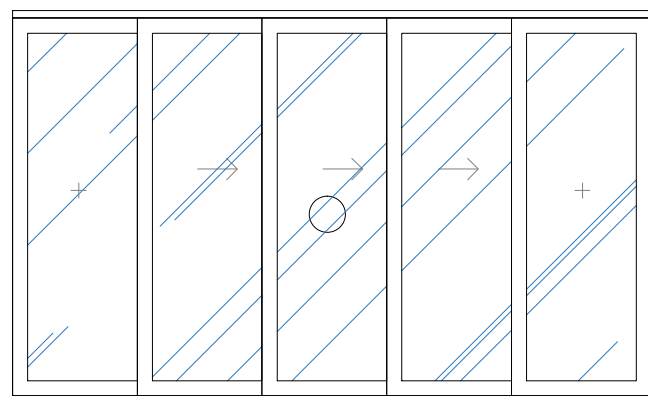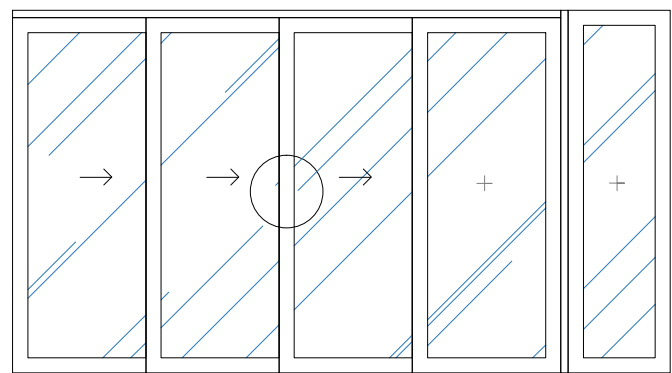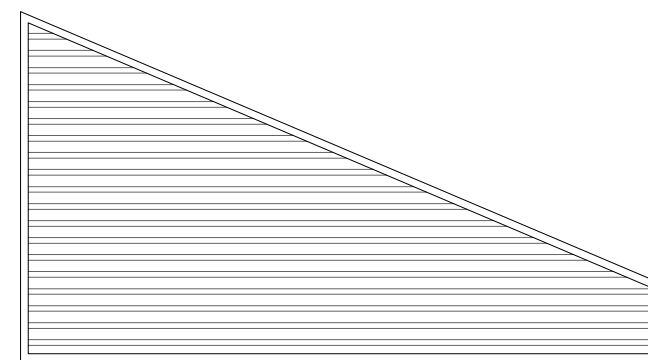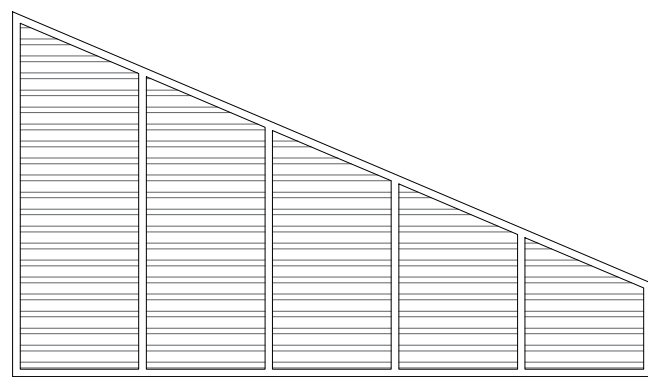


G1
3600 mm x 1800 mm (x1)

PU spray painted steel box structure with extruded mesh



DW1
3625 mm x 2400 mm (x1)

Alumiumm 4-sash sliding door with glass panels to open towards a single side as per architect's specification.





















DW2
4225 mm x 2550 mm (x1)

Alumiumm 5-sash sliding door with glass panels to open towards a single side as per architect's specification.

Project
PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA

Title
DOOR AND WINDOWS (1:50)

Drawing No. **QS2111/CW/ARC-04**

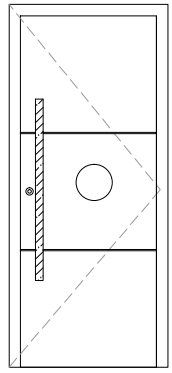

D1 –Main Door
1050mm x 2400mm (x1)

Engineered Timber door with groove cut as per drawing with Stainless Steel Door Bar to open towards a single side as per architect's specification.

D2 –Powder Room Door
800mm x 2400mm (x1)

Engineered Timber door with Seamless Hidden Hinge to open towards a single side as per architect's specification.

D3 –Kitchen Door
900mm x 2400mm (x1)

Engineered Sliding Timber door with finger groove Hinge to slide open towards a single side as per architect's specification.

D4 –Kitchen Service Door
900mm x 2400mm (x1)

Aluminum Single sash door with pin head glass and louvers as per architect's specification.

D5 –Staff Toilet Door
900mm x 2400mm (x1)

Aluminum Single sash door with pin head glass and louvers as per architect's specification.

D6 –Bathroom 01 + Master Bathroom Door
800mm x 2250mm (x2)

Engineered Timber door with groove cut to open towards a single side as per architect's specification.

D7 –Bedroom 01 + Master Bedroom Door
900mm x 2400mm (x1)

Engineered Timber door with groove cut to open towards a single side as per architect's specification.

D8 –Bedroom 02
900mm x 2400mm (x1)

Engineered Timber door with groove cut to open towards a single side as per architect's specification.

D9 –Service duct
775mm x 2400mm (x1)

Aluminum Louver door to open towards a single side as per architect's specification.

D10 –WT Access Door
775mm x 1800mm (x1)



Concealed Engineered Timber door to open towards a single side as per architect's specification.

Door & Window Schedule			
Tag	Quantity	Size (w x h x d)	Description
Doors:			
D1	1	1050mm x 2400mm x 100mm	Engineered Timber Door –Main Entrance Door
D2	1	800mm x 2400mm x 100mm	Engineered Timber Door – Hidden Hinge /Seamless Door
D3	1	900mm x 2400mm x 100mm	Engineered Timber Sliding Door
D4	1	900mm x 2400mm x 75mm	Aluminum door with pin head glass and louvers
D5	1	800mm x 2400mm x 75mm	Aluminum door with pin head glass and louvers
D6	2	800mm x 2400mm x 100mm	Engineered Timber Door with groove cut
D7	1	900mm x 2400mm x 100mm	Engineered Timber Door –with groove cut
D8	1	900mm x 2400mm x 100mm	Engineered Timber Door –with groove cut
D9	1	775mm x 2400mm x 75mm	Aluminum Louver door to open towards a single side as per architect's specification.
D10	1	700mm x 1800mm x 100mm	Engineered Timber Door
Door/Windows:			
DW1	1	4200mm x 2400mm x 250mm	Powder Coated Aluminum Sliding door with Glazing
DW2	1	4225mm x 2550mm x 250mm	Powder Coated Aluminum Sliding door with Glazing
Windows:			
W1	1	2925mm x 1720mm x 75 mm	Powder Coated Aluminum Window with Glazing
W2	2	750mm x 2400mm x 75 mm	Powder Coated Aluminum Fixed Glass Window
W3	1	600mm x 1350mm x 75 mm	Powder Coated Aluminum Window with Glazing
W4	1	1675mm x 2550mm x 100 mm	Powder Coated Aluminum Louver Windows
W5	1	2425mm x 2550mm x 100 mm	Powder Coated Aluminum Louver Windows
W6	2	500mm x 1950mm x 75 mm	Powder Coated Aluminum Window with Glazing
W7	1	675mm x 2550mm x 75mm	Powder Coated Aluminum Window with Glazing
W8	1	800mm x 2400mm x 75mm	Powder Coated Aluminum Window with Glazing
W9	1	470mm x 5450mm x 75mm	Powder Coated Aluminum Window with Glazing
W10	1	750mm x 2400mm x 75mm	Powder Coated Aluminum Window with Glazing

Project
PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA


Title
DOORS AND WINDOWS (1:50)

Drawing No. **QS2111/CW/ARC-04**

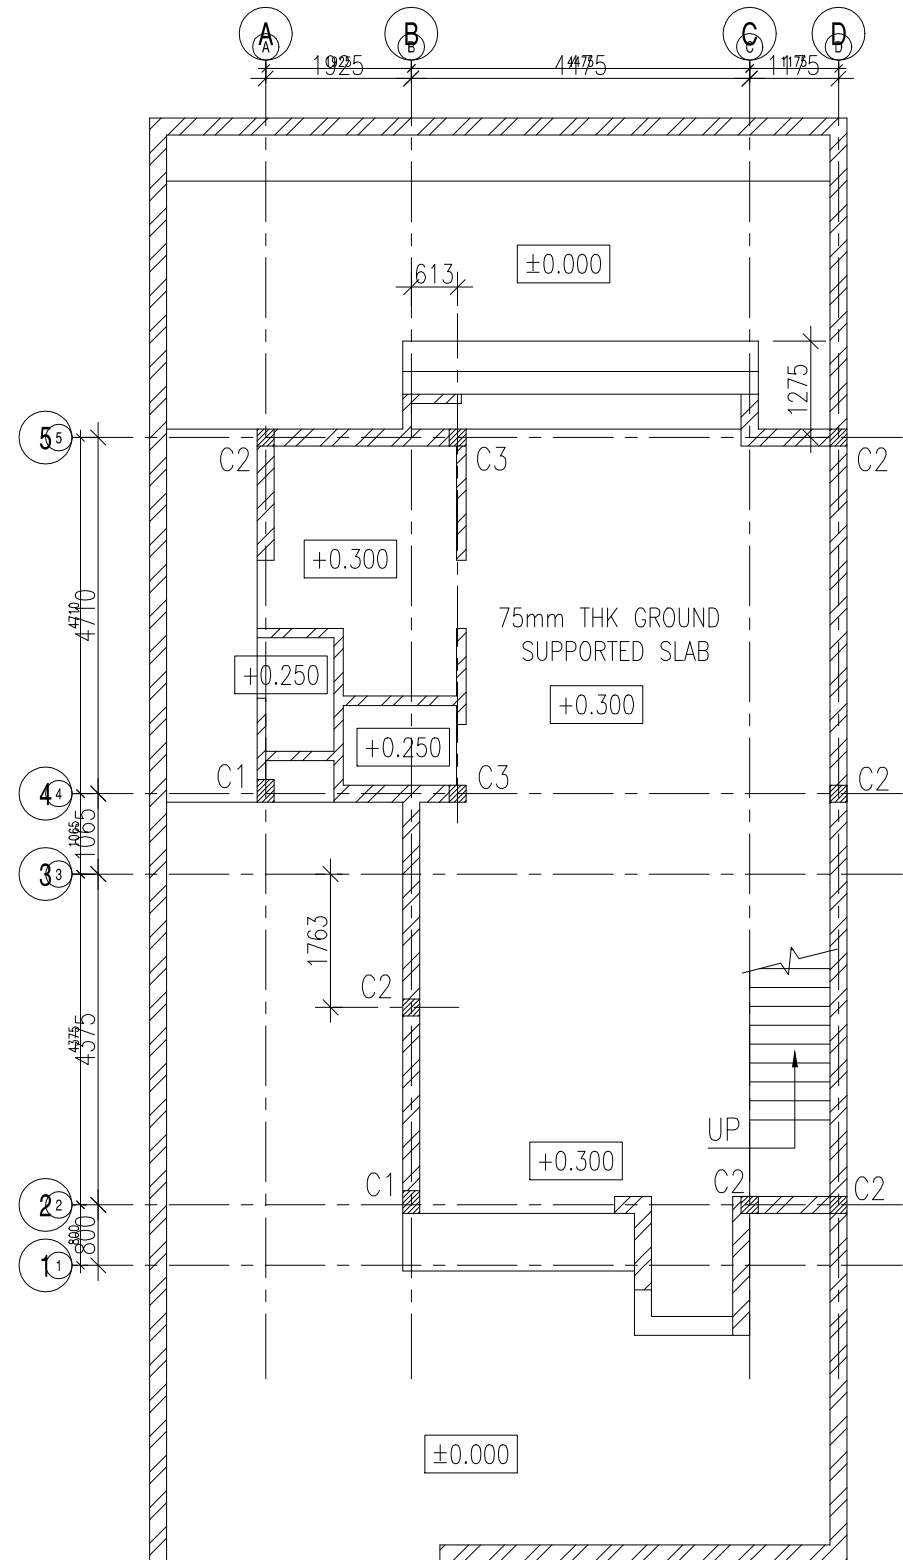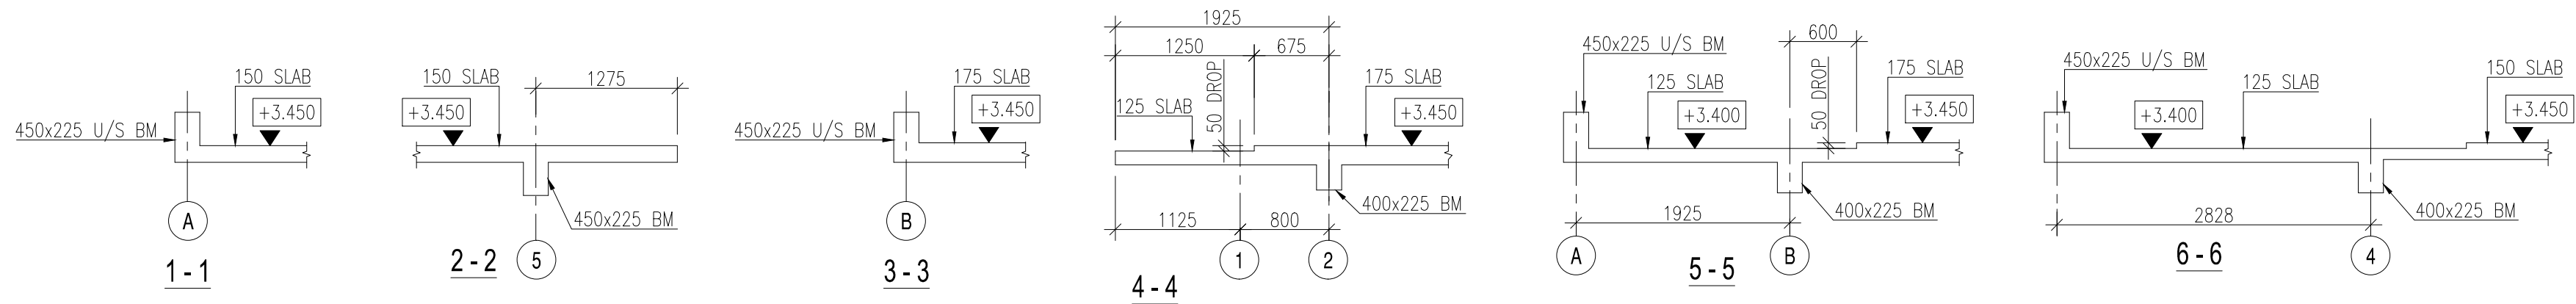


GROUND FLOOR PLAN

NOTE:
1. ALL COLUMNS ARE 225x225 UNLESS OTHERWISE STATED.

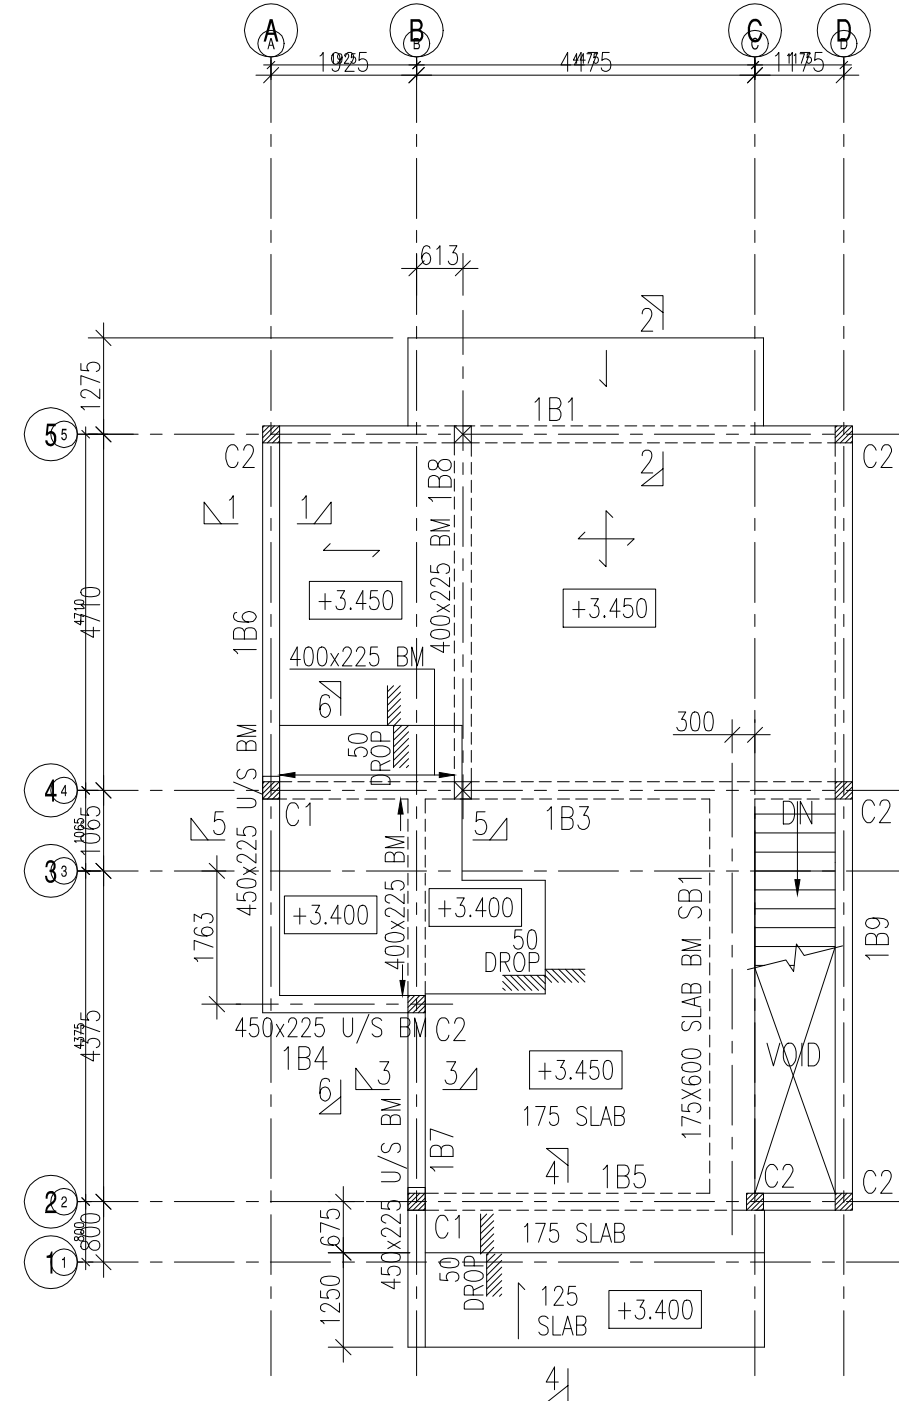

FIRST FLOOR PLAN

NOTE:
1. ALL COLUMNS ARE 225x225 UNLESS OTHERWISE STATED.
2. ALL BEAMS ARE 450x225 UNLESS OTHERWISE STATED.
3. ALL SLABS ARE 150mm THK UNLESS OTHERWISE STATED.

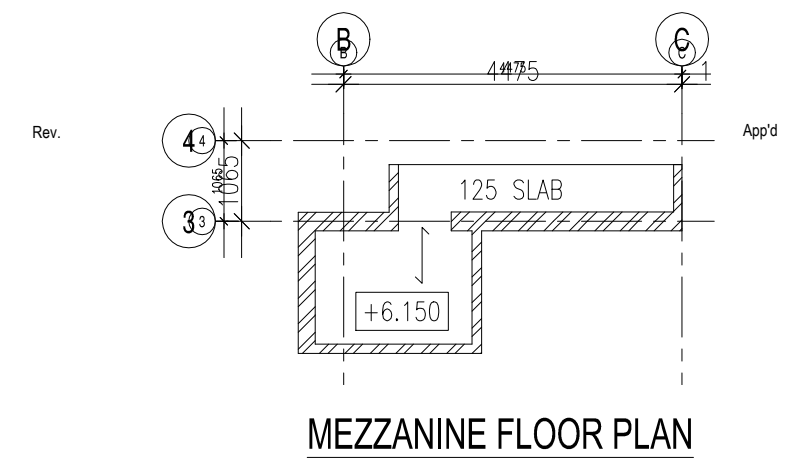

MEZZANINE FLOOR PLAN

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	GENERAL ARRANGEMENT GROUND, FIRST FLOOR & MEZZANINE FLOOR PLANS
Drawing No.	QS2111/CW/STU-01









STRUCTURAL STEEL

- ALL STRUCTURAL KEY PLANS AND DETAILS ARE TO BE READ IN CONJUNCTION WITH THE RELEVANT DRAWINGS, SPECIFICATIONS, BILL OF QUANTITIES AND ALL OTHER RELEVANT DOCUMENTS. DISCREPANCIES MUST BE REPORTED IMMEDIATELY TO ENGINEER/ CONSULTANTS
- THE STRUCTURAL STEEL WORK SHOWN ON THE DRAWINGS AND DESCRIBED IN THIS SPECIFICATION HAS BEEN DESIGNED TO BS 5950, 1990, EXCEPT ROOFING SHEETS AND PURLINS.
- ALL STEEL SHALL BE MILD STEEL TO BS 4360, GRADE 43 OR S275 UNLESS OTHERWISE STATED.
- ALL WELDS ARE 6mm FILLET WELDS TO FULL LENGTH, UNLESS OTHERWISE STATED.
- SURFACE TREATMENT
 - THE STEEL MEMBERS SHOULD BE SAND BLASTED/POWER BRUSHED AS PER ENGINEER'S INSTRUCTIONS TO REMOVE MILL SCALE DIRT AND GREASE.
 - APPLY TWO COATS OF ZINC PHOSPHATE AND TWO COAT OF ENAMEL GLOSS PAINT.

- ALL DIMENSIONS AND DETAILS TO BE VERIFIED ON SITE AND CHECKED BY THE CONTRACTOR AGAINST ARCHITECTS DRAWINGS AND ANY DISCREPANCIES SHOULD BE REPORTED IN ADVANCE.
- HOLES FOR BOLTS SHALL NOT EXCEED THE DIAMETER OF THE BOLT BY MORE THAN 2mm.
- PROPRIETARY NON SHRINK GROUT WITH A COMPRESSIVE STRENGTH OF 60 N/mm² AT 28 DAYS SHOULD BE USED UNDER THE BASE-PLATE AFTER ERECTION AND ALIGNMENT OF THE STEEL FRAME.




9. CONTRACTOR TO PREPARE SHOP DRAWING AND FORWARD TO ENGINEER FOR VERIFICATION AND APPROVAL PRIOR TO FABRICATION OF STRUCTURAL STEEL WORKS.

- ALL BOLTS GRADE SHOULD BE GRADE 8.8 UNLESS OTHERWISE NOTED.

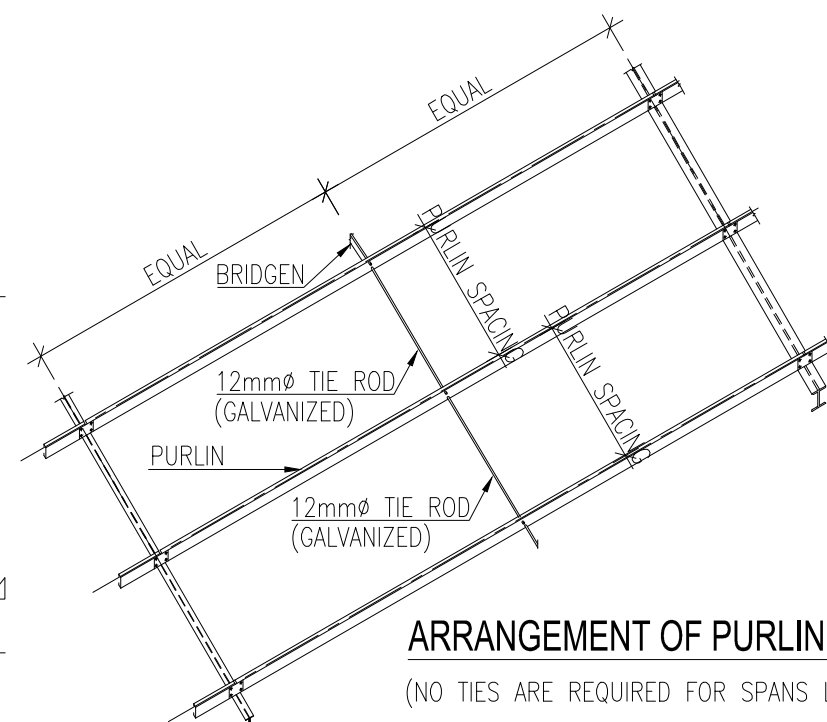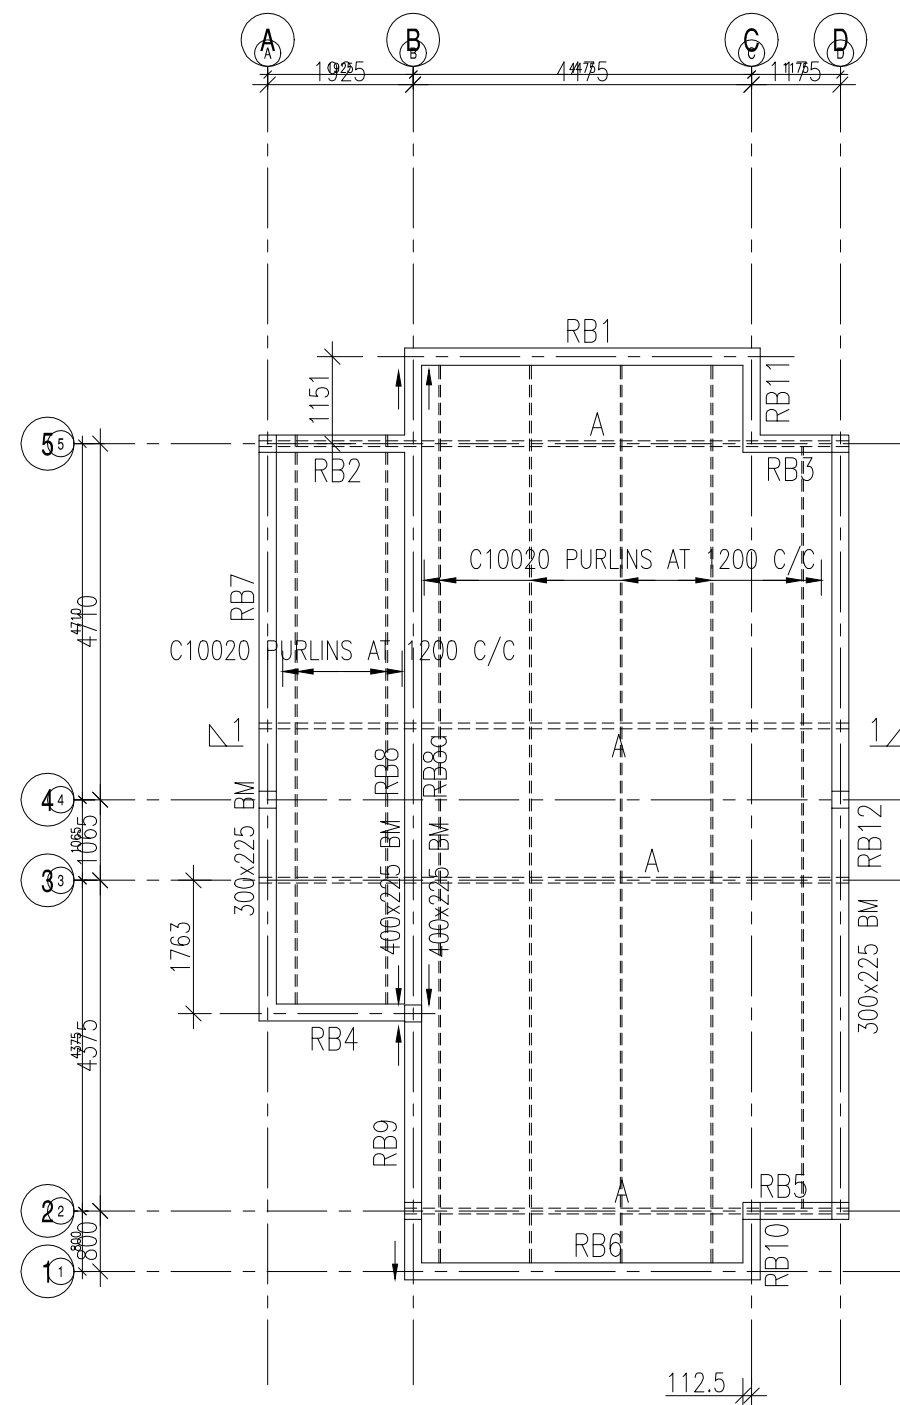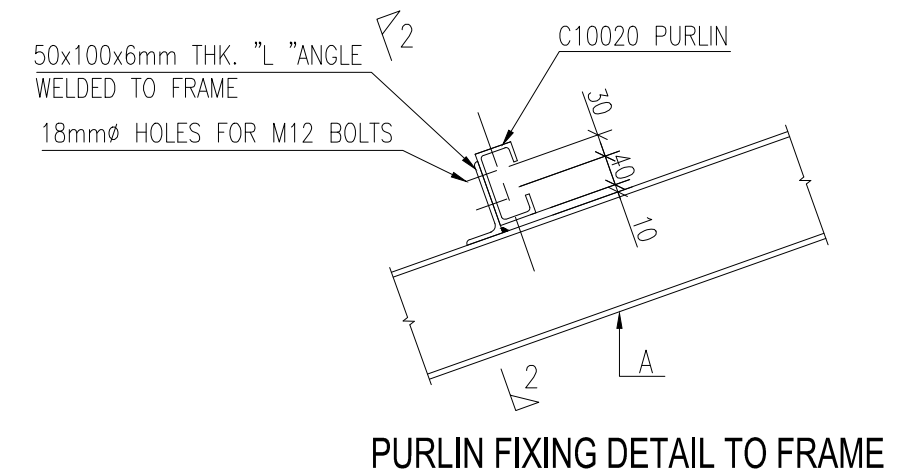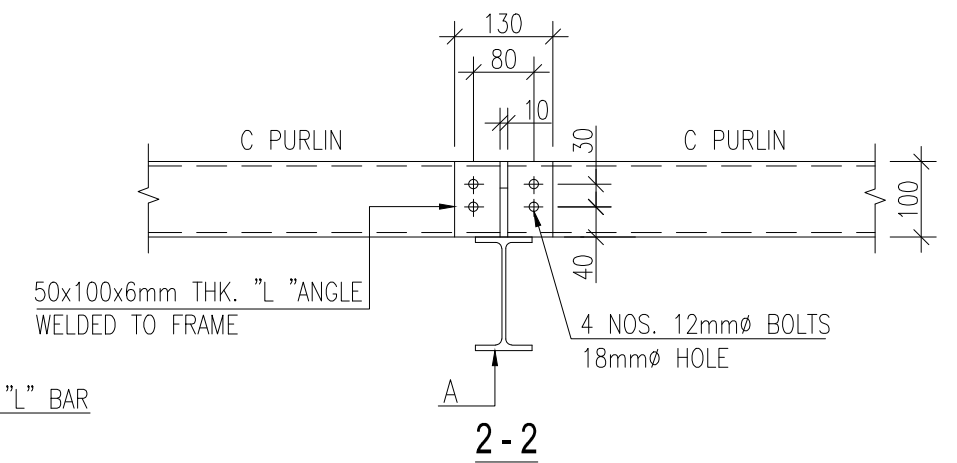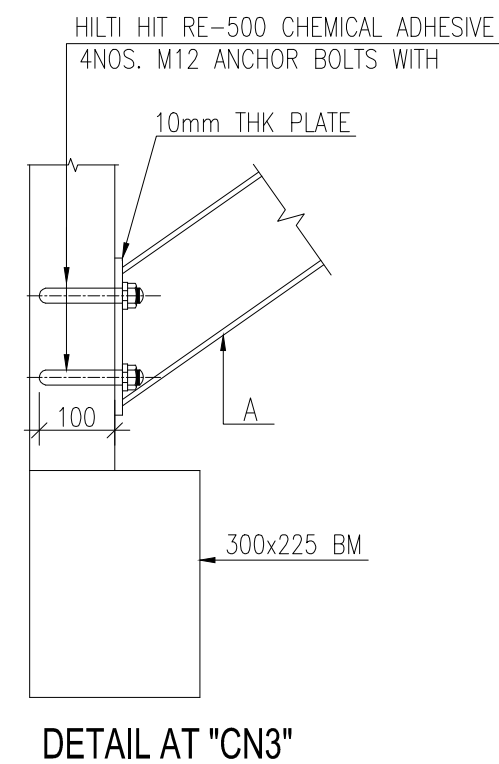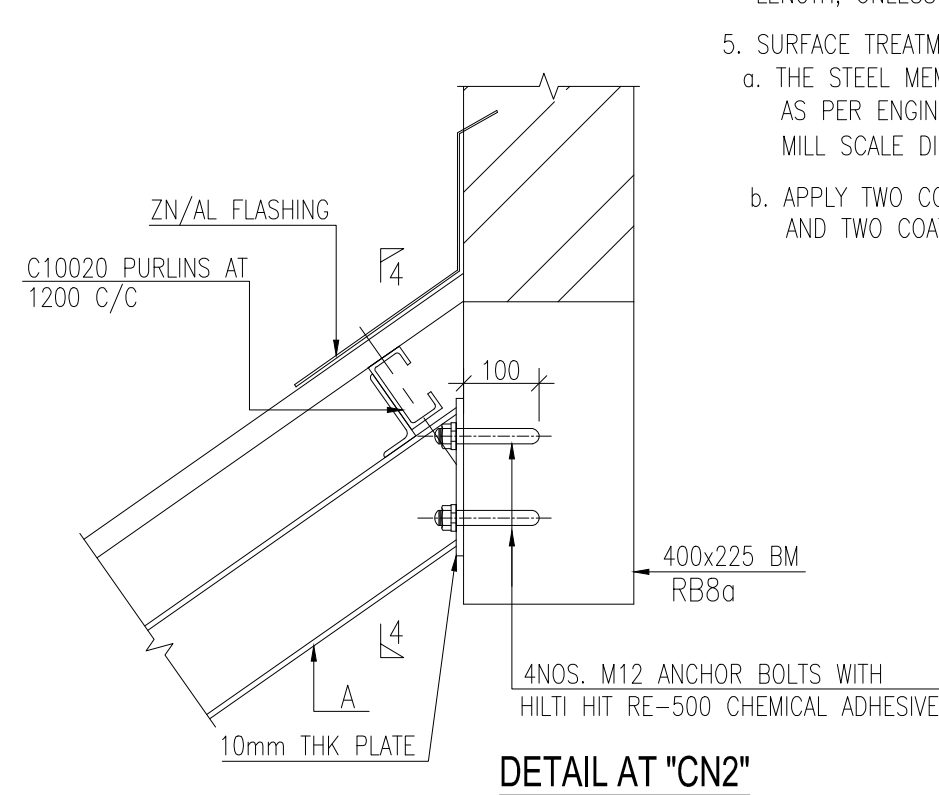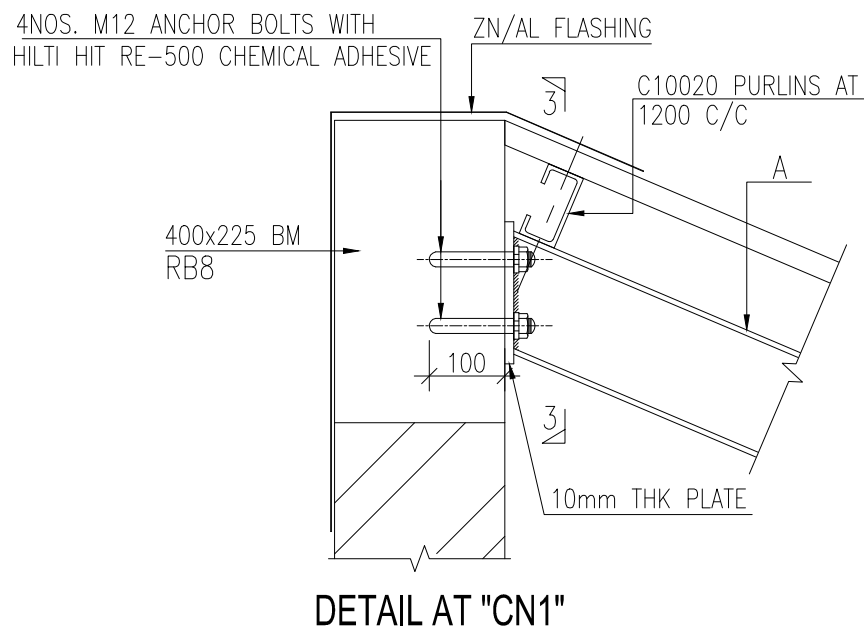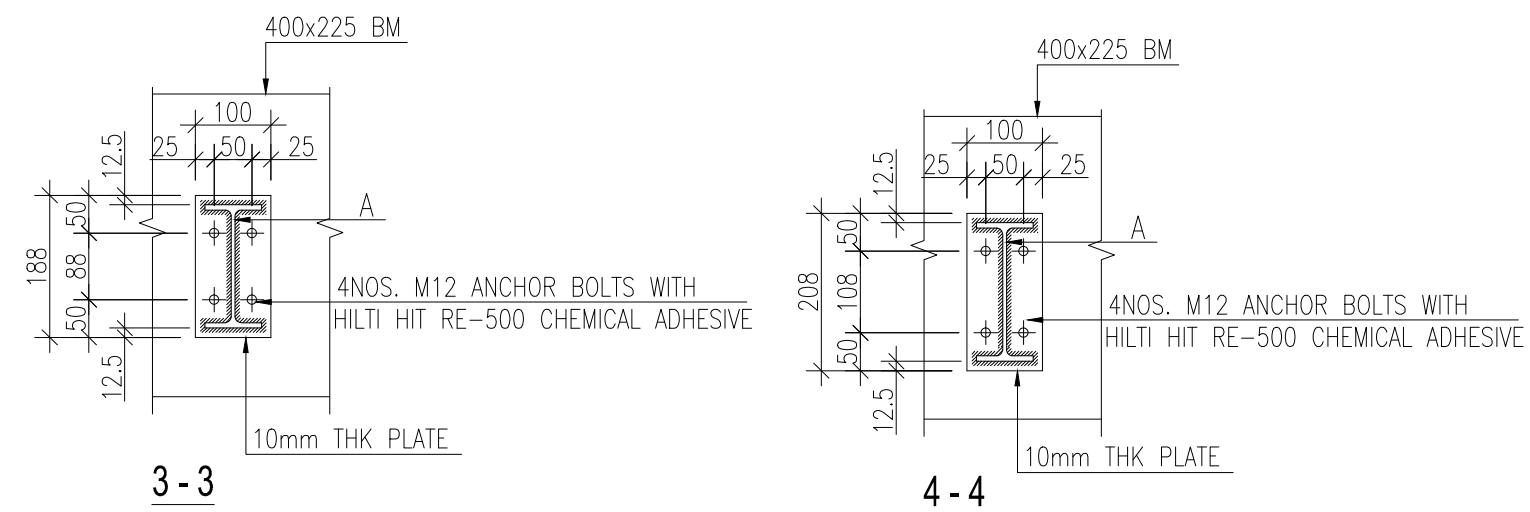


ARRANGEMENT OF PURLIN TIES


(NO TIES ARE REQUIRED FOR SPANS LESS THAN 3900mm)

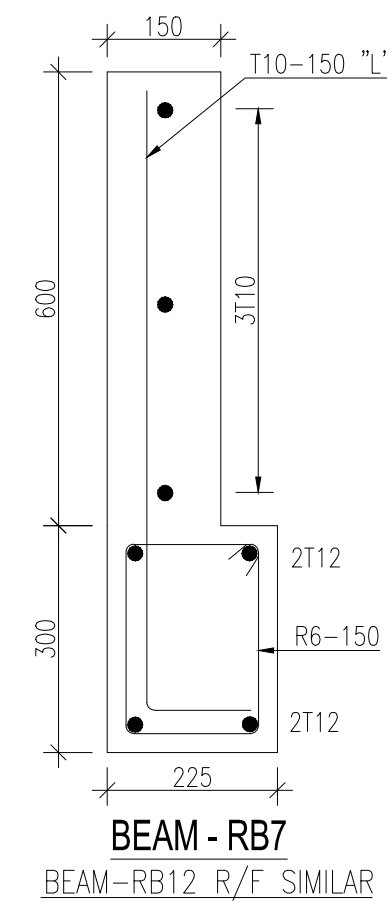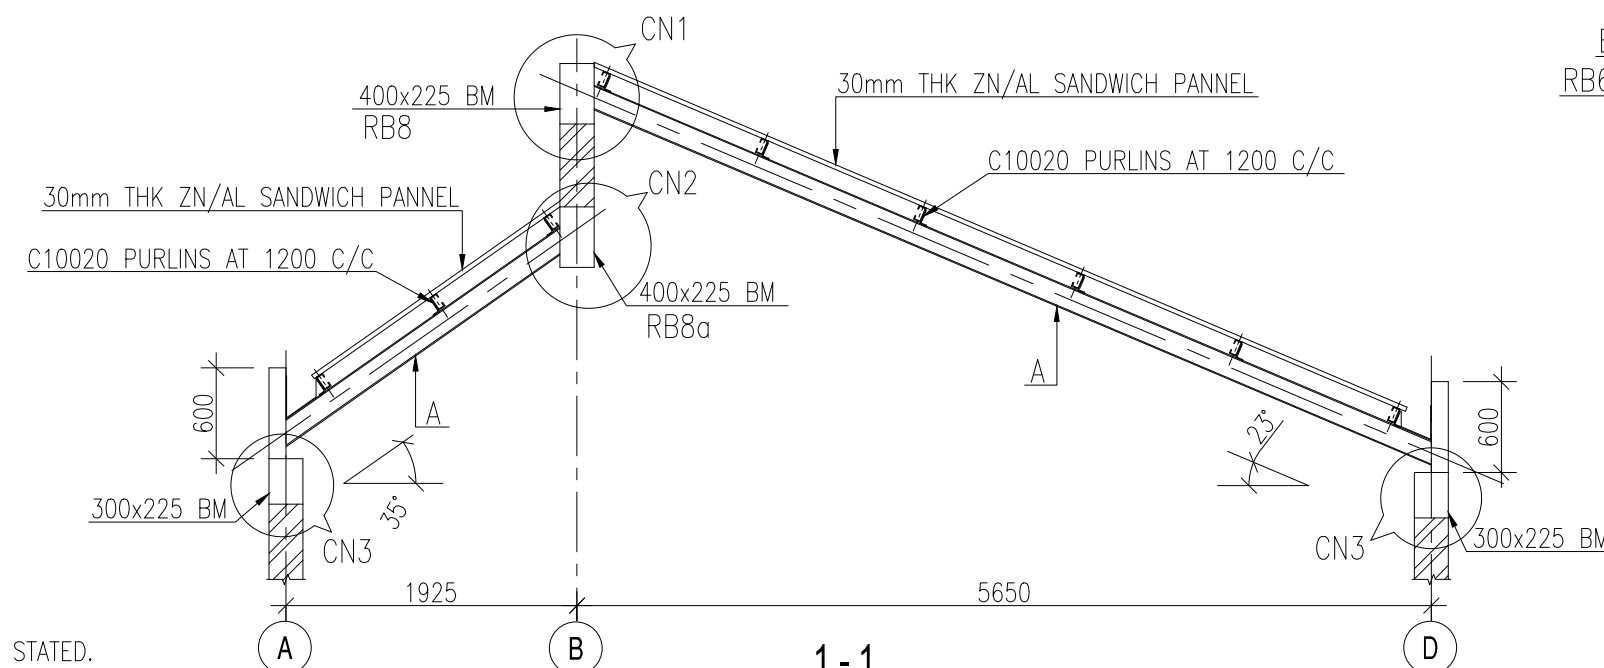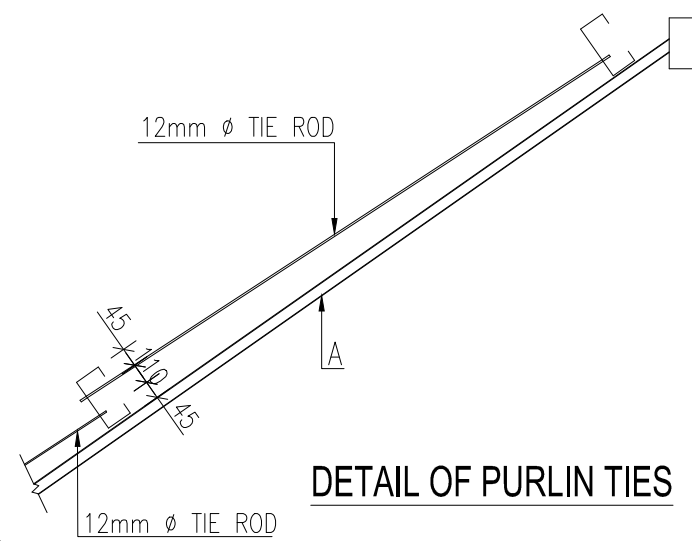

BEAM - RB7
BEAM-RB12 R/F SIMILAR

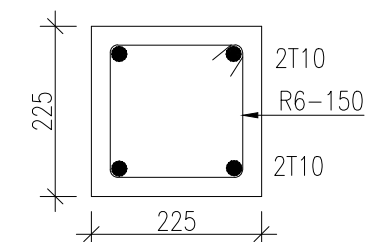

BEAM - RB1
BEAM-RB2, RB3, RB4, RB5, RB6, RB9 & RB10 R/F SIMILAR

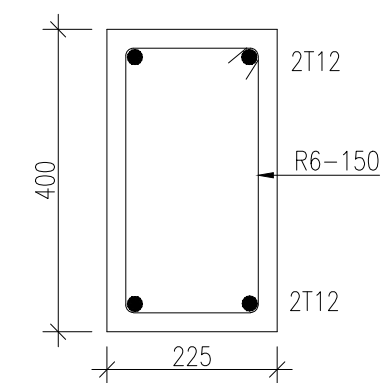


BEAM - RB8
BEAM-RB8a R/F SIMILAR
TYPICAL SECTIONS OF BEAM


LEGEND:
A = 150x75x14.0 kg/m "I"

NOTE:
1. ALL BEAMS ARE 225x225 UNLESS OTHERWISE STATED.

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	ROOF DETAILS
Drawing No.	QS2111/CW/STU-02

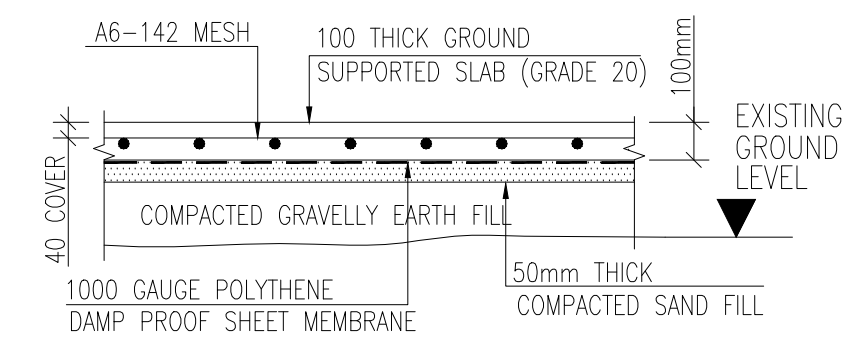

FOUNDATION LAYOUT

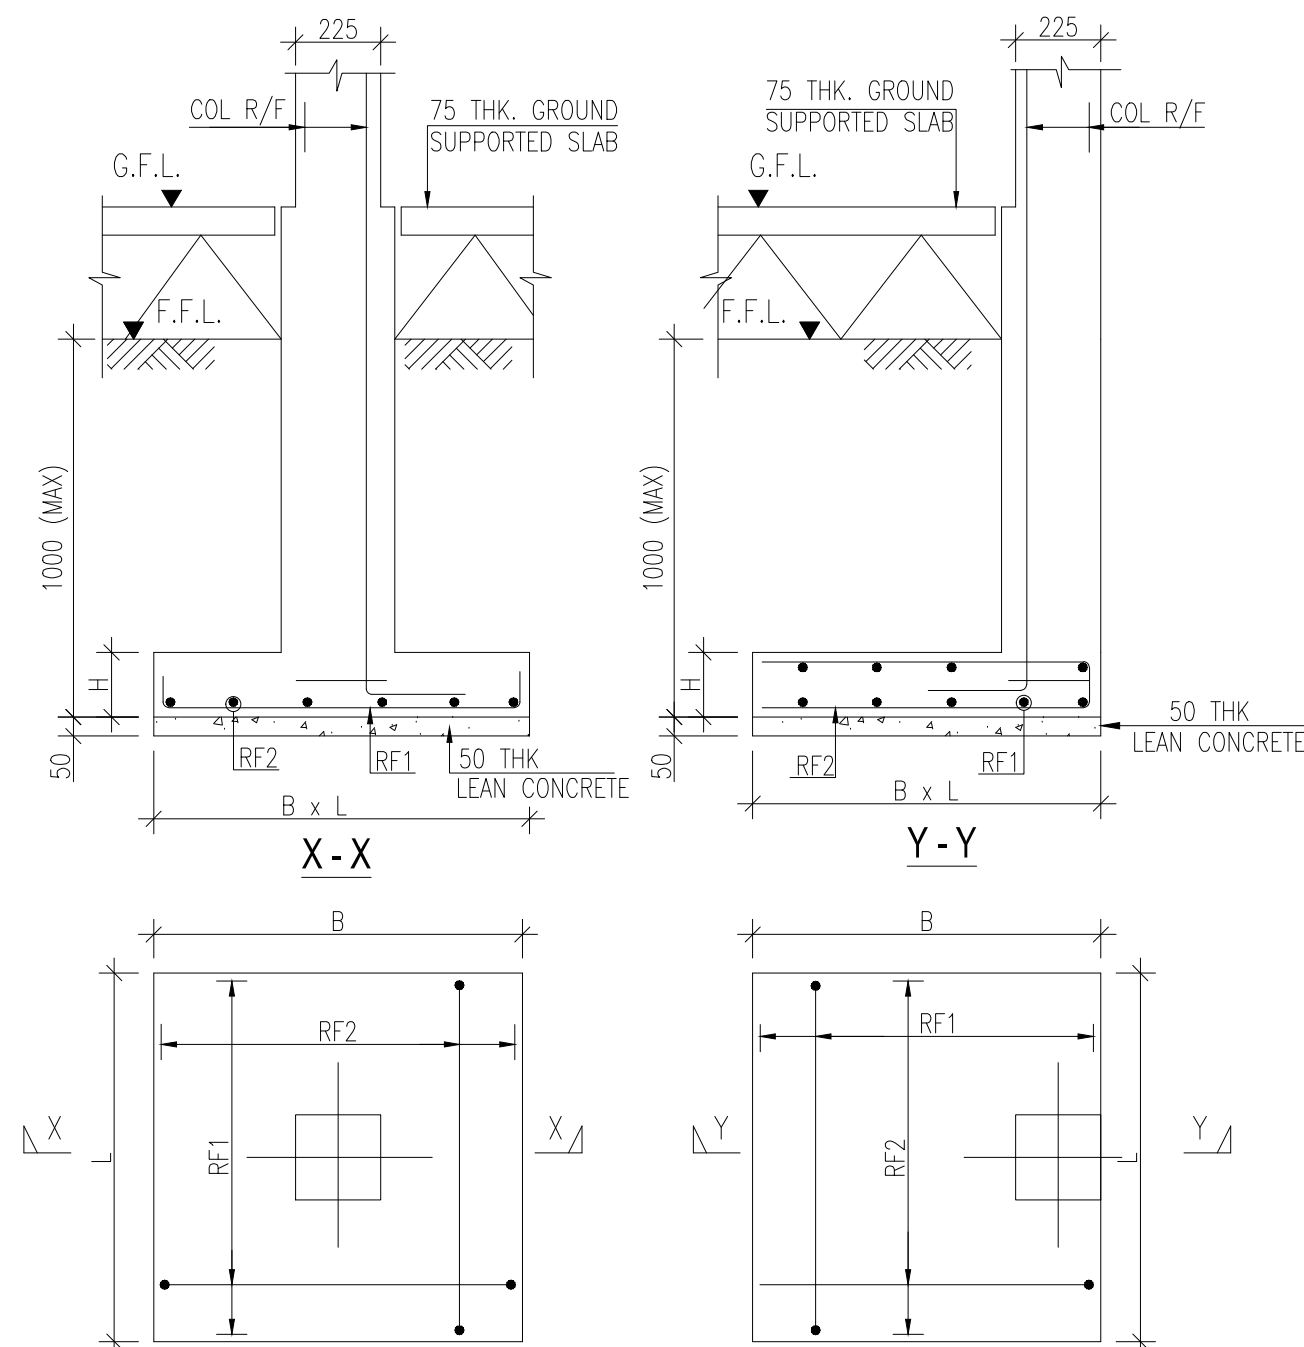

FOOTING - F5

TYPE	L	W	H	R/F	
				RF1	RF2
F1	1000	1000	200	T10-150	T10-150
F2	1200	1200	200	T10-150	T10-150
F3	1000	1000	250	T10-150 "U" BAR	T10-150
F4	1200	1200	250	T10-150	T10-150

NOTE:
1. ALL COLUMNS ARE 225x225 UNLESS OTHERWISE STATED.

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	LAYOUT & DETAILS OF FOUNDATIONS
Drawing No.	QS2111/CW/STU-03

NOTE:

1.0 FOUNDATION NOTES

- 1.1
- FOUNDATION IS DESIGNED FOR AN ASSUMED BEARING CAPACITY OF 200kN/m².
IF THE ASSUMED BEARING CAPACITY CAN NOT BE ACHIEVED ACCORDING TO THE CONTRACTOR'S OPINION, , CONTRACTOR SHALL INFORM THE CONSULTANT IMMEDIATELY FOR THE MODIFICATION OF FOUNDATION DETAILS.
- 1.2
- FOUNDATION SHOULD BE PLACED AT LEAST 1000mm BELOW THE EXISTING GROUND LEVEL.THE DEPTH WILL BE DETERMINED AT SITE.

2.0 CONCRETE NOTES

- 2.1
- CONCRETE GRADES SHALL BE AS FOLLOWS.
A. ALL CONCRETE FOR REINFORCED CONCRETE WORK SHALL BE GRADE C25 WITH MAXIMUM AGGREGATE SIZE 20MM UNLESS NOT ED OTHERWISE.
B. ALL SCREED CONCRETES SHALL BE GRADE 15.
C. FLOOR CONCRETES AND CONCRETE FOR THE TOILET FLOOR FILLING SHALL BE GRADE 20.
- 2.2
- CONCRETE SHALL BE WELL COMPACTED BY MECHANICAL MEAN WITHOUT SEGREGATION.
- 2.3
- ALL CONCRETE SURFACES EXCEPT THOSE COVERED BY FORM WORK SHALL BE CURED AT LEAST FOR 7 DAYS.

3.0 REINFORCEMENT STEEL NOTES










- 3.1
- ALL REINFORCING STEEL SHALL COMPLY WITH BS 4449 GRADE 460 HIGHLY DEFORMED TYPE BARS OR GRADE 250 MILD STEEL. RECOMMENDED TRADE NAMES ARE "GTB", "LANWA", "MELWA" & "CHICO". IF OTHER BRANDS ARE TO BE USED CONSULTANTS PRIOR APPROVAL SHOULD BE SOUGHT FOR.
- 3.2
- NO REINFORCING BARS SHALL BE WELDED, UNLESS NOTED OR APPROVED BY THE CONSULTANT.
- 3.3
- MINIMUM COVER TO REINFORCEMENT IS AS FOLLOWS.
A. SLABS 20 mm
B. BEAMS, COLUMNS 25 mm
C. FOUNDATIONS 40 mm
- 3.4
- LAP LENGTH SHALL BE 57 TIMES BAR DIAMETER. IF DIFFERENT BAR SIZES TO BE LAPPED, DIAMETER OF THE SMALLER BAR SHOULD BE USED TO DETERMINE THE LAP LENGTH.
- 3.5
- CONCRETE COVER BLOCKS OR STANDARD BAR CHAIRS WITH PROTECTIVE TIPS AND SPACERS SPACED AS REQUIRED TO PROVIDE SPECIFIED CONCRETE PROTECTION FOR REINFORCEMENT SHOULD BE PROVIDED, BUT NOT TO EXCEEDING 3 FEET CENTERS. BARS SHALL BE TIED IN PLACE WITH 16 GAUGE DOUBLES ANNEALED IRON WIRE.

4.0 RUBBLE FOUNDATIONS

- 4.1
- RUBBLE MASONRY SHALL BE 1:6 CEMENT:SAND MORTAR.
- 4.2
- RANDOM RUBBLE MASON UNIT SHALL BE 150X225.





5.0 TIMBER NOTES

- 5.1
- TIMBER TO BE USED FOR THE CONSTRUCTION SHALL BE APPROVED SPECIES.RED BALAU, KEMPUS ARE THE RECOMMENDED SPECIES.
- 5.2
- ALL THE TIMBER SIZES SPECIFIED ARE FINISHED SIZES.
- 5.3
- TIMBER SHOULD BE WELL SEASONED AND APPROVED PRESERVATIVES SHOULD BE APPLIED.

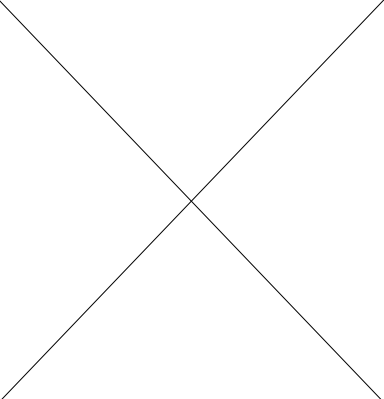
FIRST FLOOR TO ROOF LEVEL				
	MAIN BARS LINKS	4T12 VERT. BARS □ 1-SET R6-150 C/C STIRRUP	4T12 VERT. BARS □ 1-SET R6-150 C/C STIRRUP	
GROUND TO FIRST FLOOR				
	MAIN BARS LINKS	4T16 VERT. BARS □ 1-SET R6-150 C/C STIRRUP	4T12 VERT. BARS □ 1-SET R6-150 C/C STIRRUP	4T12 VERT. BARS □ 1-SET R6-150 C/C STIRRUP
FOOTING TO GROUND FLOOR				
	MAIN BARS LINKS	4T16 VERT. BARS □ 1-SET R6-150 C/C STIRRUP	4T16 VERT. BARS □ 1-SET R6-150 C/C STIRRUP	4T16 VERT. BARS □ 1-SET R6-150 C/C STIRRUP
TYPE		C1	C2	C3

SCHEDULE OF COLUMN

SCHEDULE OF LINTELS

TYPE	SECTION	MAIN R/F	STIRUPS	LOCATION
L1		2T10	-	OPENING UPTO 975mm
L2		2T10	-	OPENING 975mm – 1350mm GRD. FLOOR
L3		4T10	R6-150 Crs.	OPENING 1350mm – 1800mm GRD. FLOOR
L4		4T10	R6-150	OPENING 2250mm TO 3000mm
PLEASE CONTACT ENGINEER FOR DETAILS OF ANY OTHER OPENING SIZES.				

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	LAYOUT & DETAILS OF FOUNDATIONS
Drawing No.	QS2111/CW/STU-04

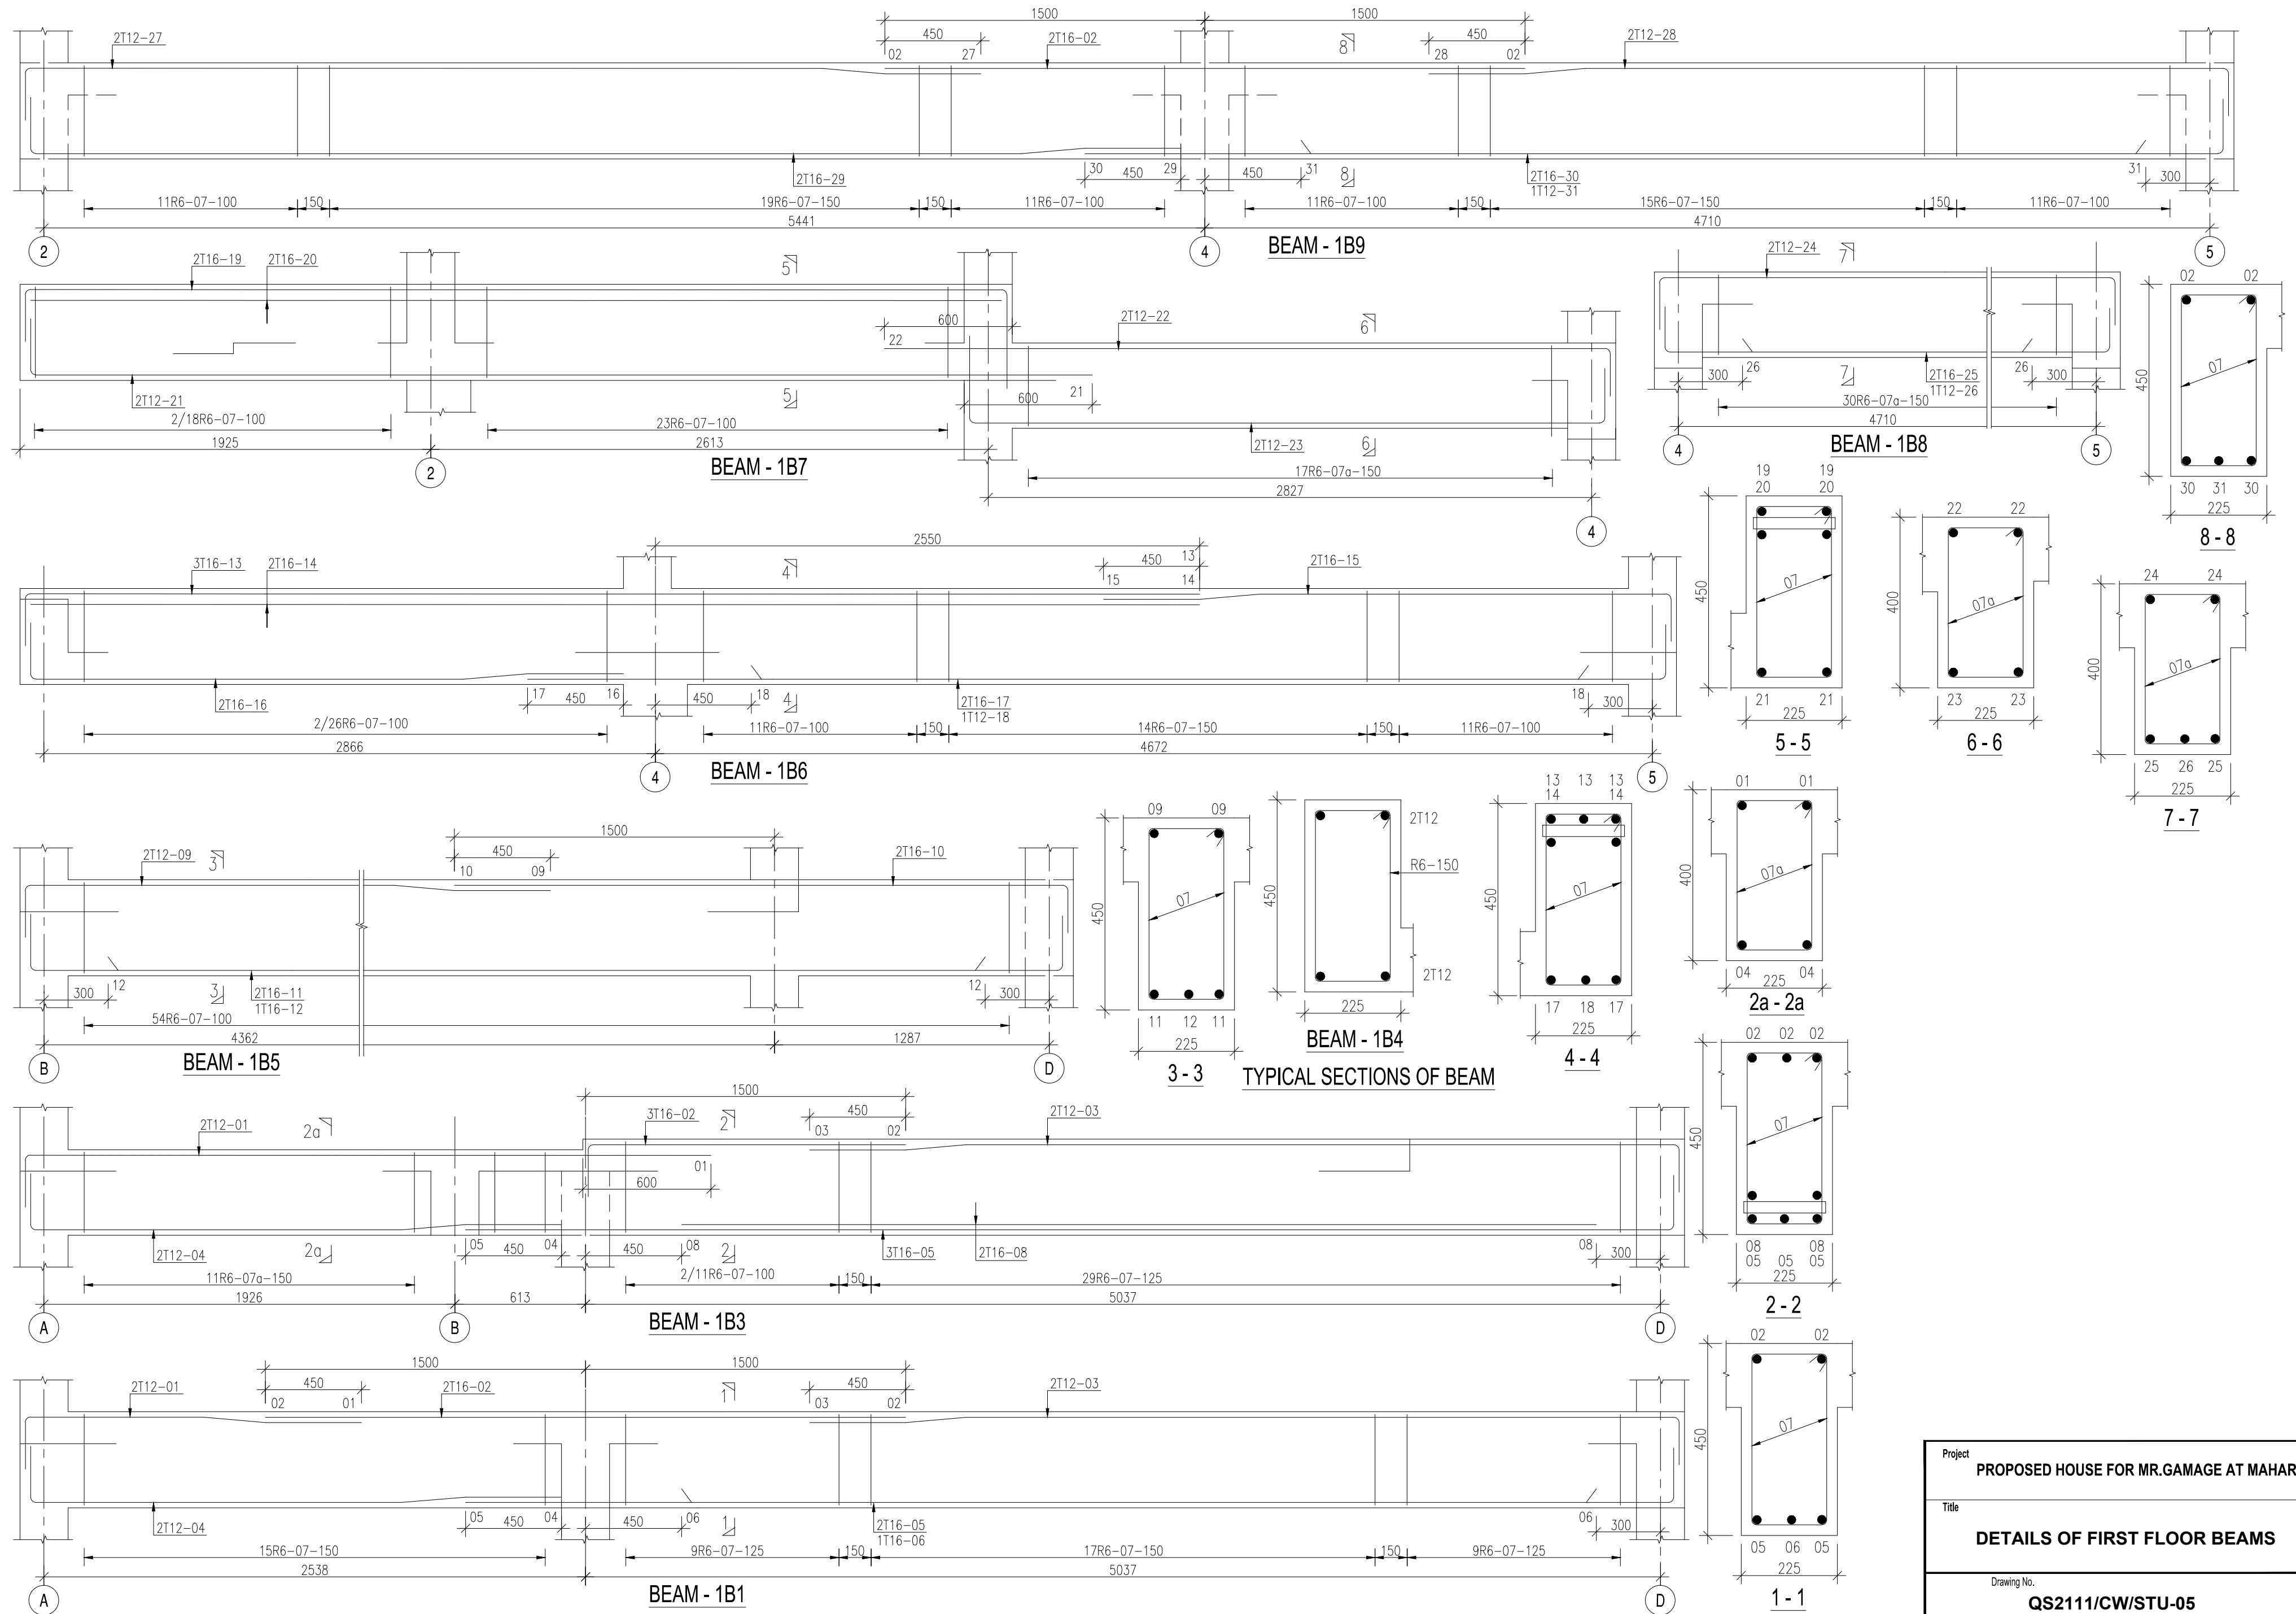






Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	DETAILS OF FIRST FLOOR BEAMS
Drawing No.	QS2111/CW/STU-05

NOTE:
DISTRIBUTION STEEL NOT SHOWN FOR CLARITY.
PROVIDE T10-300 TOP & BOTTOM WHERE NECESSARY.

NOTE:
DISTRIBUTION STEEL NOT SHOWN FOR CLARITY.
PROVIDE T10-300 TOP & BOTTOM WHERE NECESSARY.

TYPICAL SECTIONS OF SLAB BEAM

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	DETAILS OF FIRST FLOOR & MEZZANINE FLOOR SLABS
Drawing No.	QS2111/CW/STU-06

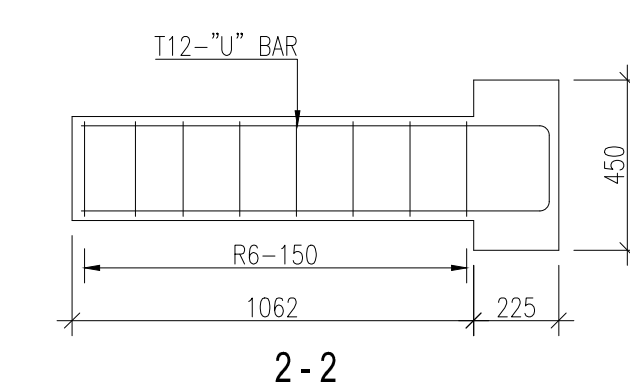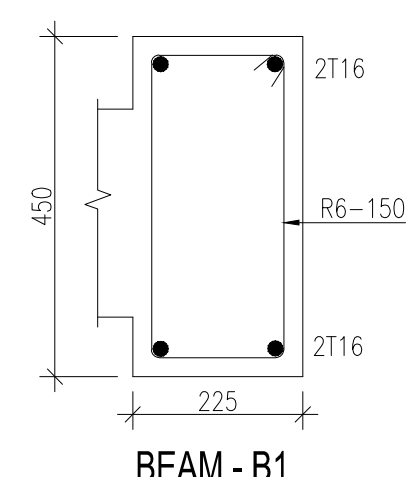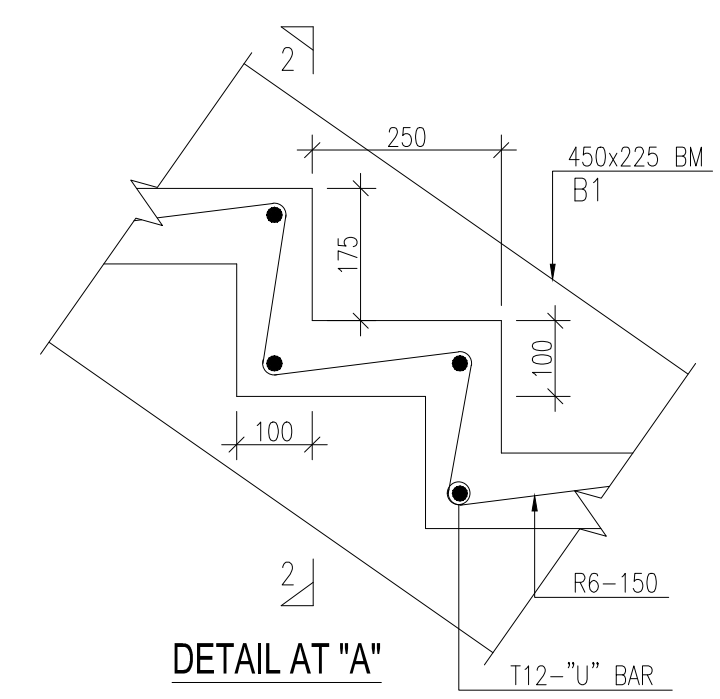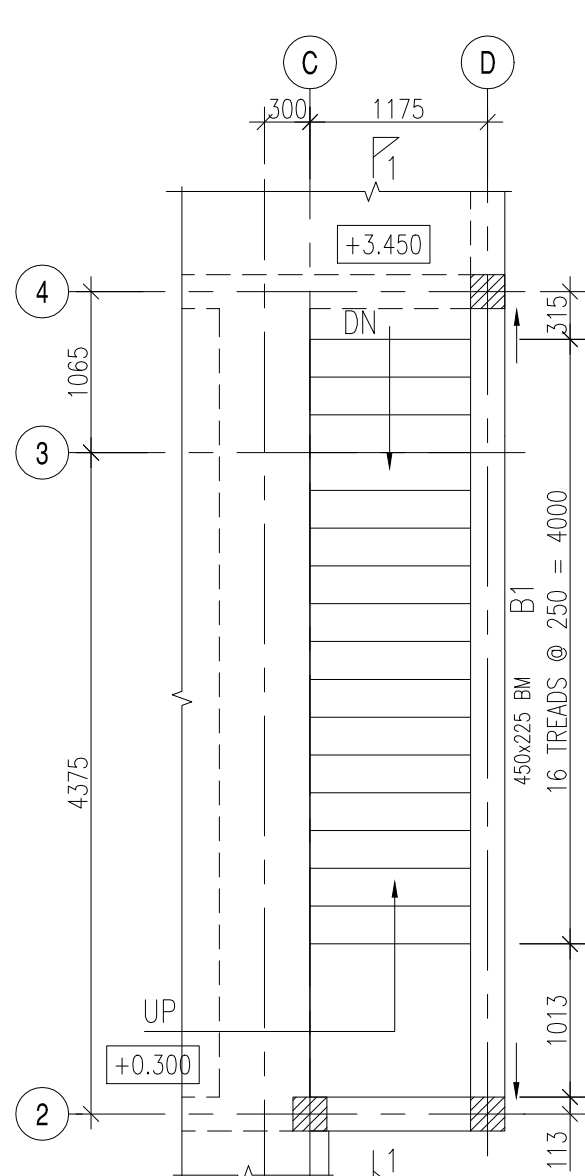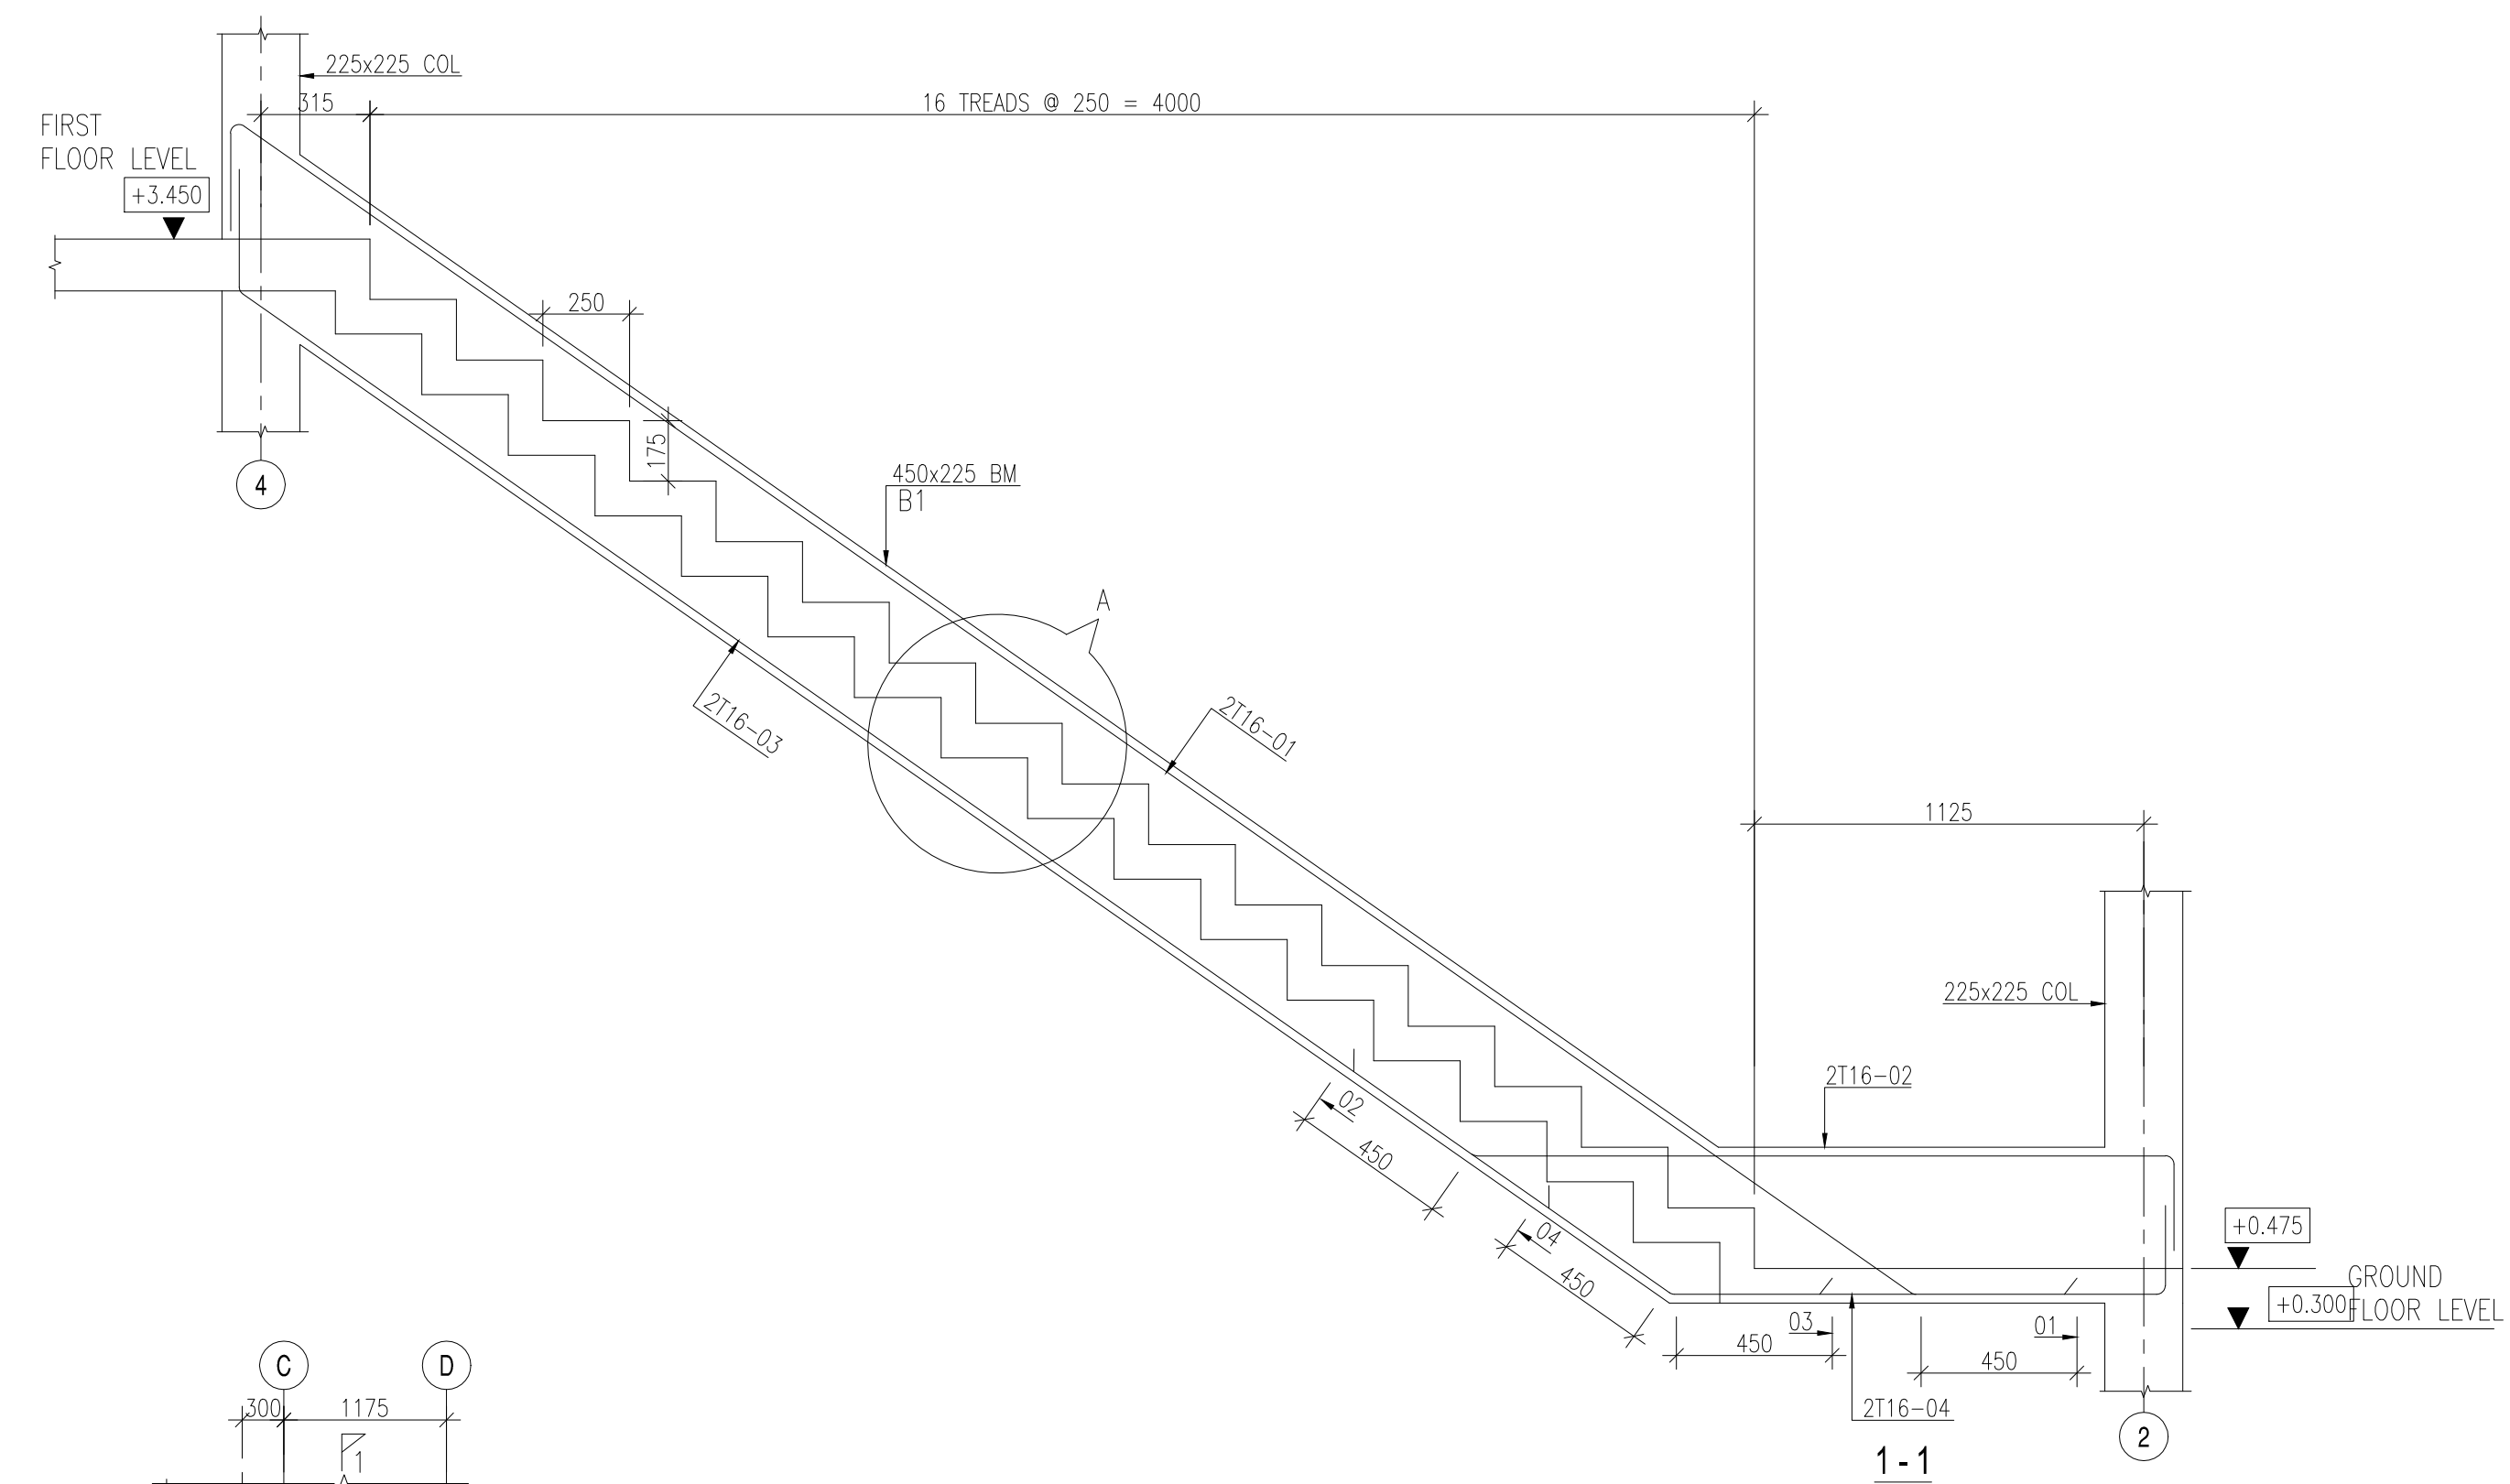

PLAN
GROUND FLOOR TO FIRST FLOOR LEVEL

Project	PROPOSED HOUSE FOR MR.GAMAGE AT MAHARAGAMA
Title	STAIRCASE DETAILS
Drawing No.	QS2111/CW/STU-07